

الکترونیک
منعتامن

SANAT AMN ELECTRONIC

@lhua
TECHNOLOGY

H D C V I

PRODUCT PRICE LIST

با خرید محصولات صنعت امن
از باشگاه مشتریان صنعت امن
هدیه دریافت نمایید



HDCVI CAMERA

تصویر

مدل

مشخصات

قیمت



DH-HAC-B1A21P



2MP HDCVI IR Bullet Camera
> Max. 30 fps@1080p
> CVI/CVBS/AHD/TVI switchable
> 3.6 mm fixed lens (2.8 mm, 6 mm optional)
> Max. IR length 20 m, Smart IR
> IP67, 12 VDC

بات ۲ مگ

۱,۰۱۰,۰۰۰



DH-HAC-B2A21P



2MP HDCVI IR Bullet Camera
> Max. 30 fps@1080p
> CVI/CVBS/AHD/TVI switchable
> 3.6 mm fixed lens (2.8 mm, 6 mm optional)
> Max. IR length 20 m, Smart IR
> IP67, 12 VDC

بات ۲ مگ

۱,۲۱۰,۰۰۰



DH-HAC-HFW1200TP



2MP HDCVI IR Bullet Camera
> Max 30fps@1080P
> HD and SD output switchable
> 3.6mm fixed lens (2.8mm, 6mm optional)
> Max. IR length 30m, Smart IR
> IP67, DC12V

بات ۲ مگ

۱,۵۸۰,۰۰۰



DH-HAC-HFW1200DP



2MP IR HDCVI Fixed-focal Bullet Camera
> Max. 30 fps@1080p.
> Smart IR Illumination.
> 80 m illumination distance.
> Super Adapt.
> 3.6 mm fixed lens (6 mm optional).
> CVI/CVBS/AHD/TVI switchable.
> IP67, 12 VDC.

بات ۲ مگ

۱,۹۴۰,۰۰۰



DH-HAC-HFW1500TP



5MP Starlight HDCVI IR Bullet Camera
> Max 25fps@5MP (16:9 video output)
> CVI/CVBS/AHD/TVI switchable
> 3.6 mm fixed lens (2.8 mm optional)
> Max. IR length 30 m, Smart IR
> IP67, DC12V

بات ۵ مگ

۲,۴۶۰,۰۰۰



DH-HAC-HFW1500TP-A



5MP Starlight HDCVI IR Bullet Camera
> Max 25fps@5MP (16:9 video output)
> CVI/CVBS/AHD/TVI switchable
> 3.6 mm fixed lens (2.8 mm optional)
> Max. IR length 30 m, Smart IR
> IP67, DC12V

بات ۵ مگ

۲,۶۰۰,۰۰۰



DH-HAC-HFW1500DP



5MP Starlight HDCVI IR Bullet Camera
> Max 25 fps@5MP (16:9 video output)
> CVI/CVBS/AHD/TVI switchable
> 3.6 mm fixed lens (6 mm, 8 mm optional)
> Max. IR length 80 m, Smart IR
> IP67, DC12V

بات ۵ مگ

۲,۶۹۰,۰۰۰



DH-HAC-T1A21P











2MP HDCVI IR Eyeball Camera
> Max. 30 fps@1080p
> CVI/CVBS/AHD/TVI switchable
> 3.6 mm fixed lens (2.8 mm, 6 mm optional)
> Max. IR length 20 m, Smart IR
> 12 VDC







دام ۲ مگ

۱,۰۱۰,۰۰۰

HDCVI CAMERA

تصویر	مدل	مشخصات	قیمت
	DH-HAC-T2A21P	<ul style="list-style-type: none"> 2MP HDCVI IR Eyeball Camera > Max. 30 fps@1080p > CVI/CVBS/AHD/TVI switchable > 3.6 mm fixed lens (2.8 mm, 6 mm optional) > Max. IR length 20 m, Smart IR > IP67,12 VDC 	۱,۲۱۰,۰۰۰
	DH-HAC-HDW1200RP	<ul style="list-style-type: none"> 2MP HDCVI IR Eyeball Camera > Max 30fps@1080P > HD and SD output switchable > 3.6mm fixed lens (2.8mm optional) > Max. IR length 20m, Smart IR > DC12V 	۱,۰۴۰,۰۰۰
	DH-HAC-HDW1200TRQP-A	<ul style="list-style-type: none"> 2MP IR HDCVI Fixed-focal Eyeball Camera > Max. 30 fps@1080p. > Smart IR Illumination. > 30 m illumination distance. > Super Adapt. > Quick-to-install eyeball saves installation time. > 3.6 mm fixed lens (2.8 mm optional). > CVI/CVBS/AHD/TVI switchable. > IP50, 12 VDC. 	۱,۴۰۰,۰۰۰
	DH-HAC-HDW1200TQP-A	<ul style="list-style-type: none"> 2MP IR HDCVI Fixed-focal Eyeball Camera > Max. 30 fps@1080p. > Smart IR Illumination. > 40 m illumination distance. > Super Adapt. > Built-in Mic. > Quick-to-install eyeball saves installation time. > 3.6 mm fixed lens (2.8 mm optional). > CVI/CVBS/AHD/TVI switchable. > IP67, 12 VDC. 	۱,۶۸۰,۰۰۰
	DH-HAC-HDW1500TRQP-A	<ul style="list-style-type: none"> 5MP Starlight HDCVI Quick-to-install IR Eyeball Camera > Max 25 fps@5MP (16:9 video output) > Quick-to-install eyeball saves installation time > Built-in mic (-A) > CVI/CVBS/AHD/TVI switchable > 3.6 mm fixed lens (2.8 mm optional) > Max. IR length 25 m, Smart IR > IP50, DC12V 	۲,۰۰۰,۰۰۰
	DH-HAC-HDW1500TQP-A	<ul style="list-style-type: none"> 5MP Starlight HDCVI Quick-to-install IR Eyeball Camera > Max 25 fps@5MP (16:9 video output) > Quick-to-install eyeball saves installation time > CVI/CVBS/AHD/TVI switchable > 3.6 mm fixed lens (2.8 mm, 6 mm optional) > Built-in mic(-A) > Max. IR length 40 m, Smart IR > IP67, DC12V 	۲,۳۳۰,۰۰۰
	DH-HAC-HDW1500TMQP-A	<ul style="list-style-type: none"> 5MP Starlight HDCVI Quick-to-install IR Eyeball Camera > Max 25 fps@5MP (16:9 video output) > CVI/CVBS/AHD/TVI switchable > Quick-to-install eyeball saves installation time > 3.6 mm fixed lens (2.8 mm, 6 mm optional) > Built-in mic(-A) > Max. IR length 60 m, Smart IR > IP67, DC12V 	۲,۶۹۰,۰۰۰
	DH-HAC-HDBW2231RP-Z	<ul style="list-style-type: none"> 2MP Starlight HDCVI PoC IR Dome Camera > Starlight, 120dB true WDR, 3DNR > Max 30fps@1080P > HD and SD output switchable > 2.7-13.5mm motorized lens > Max. IR length 30m, Smart IR > IP67, IK10, POC/DC12V 	۴,۶۲۰,۰۰۰






HDCVI CAMERA

تصویر	مدل	مشخصات	قیمت
	DH-HAC-HDBW2241RP-Z	2MP Starlight HDCVI IR Dome Camera > Starlight, 120dB true WDR, 3DNR > Max. 30fps@1080P > HD/SD output switchable > Audio in interface > 2.7-13.5mm motorized lens > Max. IR length 30m, Smart IR > IP67, IK10, AC24V/DC12V	۴,۸۵۰,۰۰۰
		دوم ۲ مگ موتوریزد	
	DH-HAC-HDBW2501RP-Z	5MP Starlight HDCVI IR Dome Camera > Max. 25 fps@5MP (16:9 video output) > Starlight, 120 dB true WDR, 3D NR > CVI/CVBS/AHD/TVI switchable > 2.7 mm-13.5 mm motorized lens > Max. IR length 30 m, Smart IR > IP67, IK10, 24V AC/12V DC	۴,۱۶۰,۰۰۰
		دوم ۲ مگ موتوریزد	
	DH-HAC-HDBW2802RP-Z	4K Starlight HDCVI IR Dome Camera > Starlight, 120dB True WDR, 3DNR > Max. 4K resolution > HD/SD switchable > Audio in interface > 3.6mm fixed lens (2.8mm optional) > Max. IR length 30m, Smart IR > IP67, IK10, DC12V±30%	۴,۸۵۰,۰۰۰
		دوم ۸ مگ موتوریزد	









FULL COLOR HDCVI CAMERA

تصویر	مدل	مشخصات	قیمت
	DH-HAC-HFW1209CP-LED 	2MP Full-color Starlight HDCVI Bullet Camera > Full-color starlight > 20 m illumination distance > Max. 30fps@1080P > CVI/CVBS/AHD/TVI switchable > Fixed lens (2.8 mm;3.6 mm optional) > IP67, 12V±30% DC	۱,۴۸۰,۰۰۰
	DH-HAC-HFW1209CP-A-LED 	2MP Full-color Starlight HDCVI Bullet Camera > Full-color starlight > 20 m illumination distance > Max. 30fps@1080P > CVI/CVBS/AHD/TVI switchable > Built-in mic (-A) > Fixed lens (2.8 mm;3.6 mm optional) > IP67, 12V±30% DC	۱,۵۸۰,۰۰۰
	DH-HAC-HFW1209CMP-LED 	2MP Full-color HDCVI Bullet Camera > 24/7 color imaging > 20 m illumination distance > Max. 30fps@1080P > CVI/CVBS/AHD/TVI switchable > Fixed lens (2.8 mm;3.6 mm optional) > IP67, 12V±30% DC	۱,۸۷۰,۰۰۰
	DH-HAC-HFW1209TLMP-LED 	2MP Full-color HDCVI Bullet Camera > 24/7 color imaging > 40 m illumination distance > Max. 30fps@1080P > CVI/CVBS/AHD/TVI switchable > Fixed lens (3.6 mm; 6 mm optional) > IP67, 12V±30% DC	۱,۸۷۰,۰۰۰
	DH-HAC-HFW1209TLMP-A-LED 	2MP Full-color HDCVI Bullet Camera > 24/7 color imaging > 40 m illumination distance > Max. 30fps@1080P > CVI/CVBS/AHD/TVI switchable > Fixed lens (3.6 mm; 6 mm optional) > Built-in mic > IP67, 12V±30% DC	۱,۹۸۰,۰۰۰
	DH-HAC-HFW1509TP-A-LED 	5MP Full-color HDCVI Bullet Camera > Max 25 fps@5MP (16:9 video output) > 120 dB true WDR, 3D NR > 24/7 color imaging > 20 m illumination distance > CVI/CVBS/AHD/TVI switchable > Built-in mic (-A) > 3.6 mm fixed lens (2.8 mm optional) > IP67, 12 V DC	۳,۴۷۰,۰۰۰
	DH-HAC-HFW1509TLMP-LED 	5MP Full-color HDCVI Bullet Camera > Max 25 fps@5MP (16:9 video output) > 120 dB true WDR, 3D NR > 24/7 color imaging > 40 m illumination distance > CVI/CVBS/AHD/TVI switchable > 3.6 mm fixed lens (2.8 mm optional) > IP67, 12V DC	۳,۰۵۰,۰۰۰
	DH-HAC-HFW1509TLMP-A-LED 	5MP Full-color HDCVI Bullet Camera > Max 25 fps@5MP (16:9 video output) > 120 dB true WDR, 3D NR > 24/7 color imaging > 40 m illumination distance > CVI/CVBS/AHD/TVI switchable > Built-in mic (-A) > 3.6 mm fixed lens (2.8 mm optional) > IP67, 12 V DC	۳,۲۱۰,۰۰۰









FULL COLOR HDCVI CAMERA

تصویر	مدل	مشخصات	قیمت
	<p>DH-HAC-HDW1209TLQP-LED</p> <p>Full-color Lite Series 2Mp DC 12V IP67</p>	<p>2MP Full-color Starlight HDCVI Eyeball Camera</p> <ul style="list-style-type: none"> > Full-color starlight > 20 m illumination distance > Max. 30fps@1080P > CVI/CVBS/AHD/TVI switchable > Fixed lens (2.8 mm;3.6 mm optional) > IP67, 12V±30% DC 	<p>۱,۵۲۰,۰۰۰</p>
	<p>DH-HAC-HDW1209TLQP-A-LED</p> <p>Full-color Lite Series 1080p FULL HD Audio IP67 DC 12V</p>	<p>2MP Full-color HDCVI Quick-to-install Eyeball Camera</p> <ul style="list-style-type: none"> > Full-color starlight > 20 m illumination distance > Max. 30fps@1080P > Built-in mic (-A) > Quick-to-install eyeball saves installation time > CVI/CVBS/AHD/TVI switchable > Fixed lens (2.8 mm;3.6 mm optional) > IP67, 12V±30% DC 	<p>۱,۶۸۰,۰۰۰</p>
	<p>DH-HAC-HDW1209TQP-A-LED</p> <p>Full-color Lite Series 1080p FULL HD Audio IP67 DC 12V</p>	<p>2MP Full-color HDCVI Quick-to-install Eyeball Camera</p> <ul style="list-style-type: none"> > 20 m illumination distance > Max. 30fps@1080P > Built-in mic (-A) > CVI/CVBS/AHD/TVI switchable > Fixed lens (2.8 mm;3.6 mm optional) > IP67, 12V±30% DC 	<p>۱,۸۱۰,۰۰۰</p>
	<p>DH-HAC-HDW1509TLQP-A-LED</p> <p>Full-color Lite Series 5Mp 120dB true WDR, 3D NR 24/7 color imaging Audio IP67 DC 12V</p>	<p>5MP Full-color HDCVI Quick-to-install Eyeball Camera</p> <ul style="list-style-type: none"> > Max 25 fps@5MP (16:9 video output) > 120dB true WDR, 3D NR > 24/7 color imaging > 20 m illumination distance > CVI/CVBS/AHD/TVI switchable > Built-in mic (-A) > 3.6 mm fixed lens (2.8 mm optional) > IP67, 12 V DC > Quick-to-install eyeball saves installation time 	<p>۳,۱۵۰,۰۰۰</p>
	<p>DH-HAC-HDW1509TP-A-LED</p> <p>Full-color Lite Series 5Mp 120 dB true WDR, 3D NR Audio DC 12V IP67</p>	<p>5MP Full-Color Starlight HDCVI Eyeball Camera.</p> <ul style="list-style-type: none"> > Max 25 fps@5MP (16:9 video output) > 120 dB true WDR, 3D NR > 40 m illumination distance > CVI/CVBS/AHD/TVI switchable > Built-in mic (-A) > 3.6 mm fixed lens (2.8 mm optional) > IP67, PoC (only CVI)/12 V±30% DC 	<p>۳,۵۰۰,۰۰۰</p>









HDCVI RECORDER

تصویر	مدل	مشخصات	قیمت
	DH-XVR1B04-I	<ul style="list-style-type: none"> 4 CH Penta-brid 1080N/720P Cooper 1U 1HDD Digital Video Recorder > 4-ch SMD Plus for analog channels which allows the device to trigger accurate alarms for humans and vehicles. > 4-ch AI Coding supports saving on storage and bandwidth while maintaining the details of targets in videos. > Smart H.265+/H.265 dual-stream video compression. > Supports HDCVI/AHD/TVI/CVBS/IP video inputs. > Up to 5-ch IP camera inputs and each channel supports up to 2 MP. Max 20 Mbps incoming bandwidth. 	۲,۵۷۰,۰۰۰
	DH-XVR1B08-I	<ul style="list-style-type: none"> 8 CH Penta-brid 1080N/720P Cooper 1U 1HDD Digital Video Recorder > 4-ch SMD Plus for analog channels which allows the device to trigger accurate alarms for humans and vehicles. > 8-ch AI Coding supports saving on storage and bandwidth while maintaining the details of targets in videos. > Smart H.265+/H.265 dual-stream video compression. > Supports HDCVI/AHD/TVI/CVBS/IP video inputs. > Up to 10-ch IP camera inputs and each channel supports up to 6 MP. Max 40 Mbps incoming bandwidth. 	۳,۲۶۰,۰۰۰
	DH-XVR1B16-I	<ul style="list-style-type: none"> 16 Channels Penta-brid 1080N/720P Compact 1U 1HDD WizSense Digital Video Recorder > H.265+/H.265 dual-stream video compression > Supports Full-channel AI-Coding > Supports HDCVI/AHD/TVI/CVBS/IP video inputs > Max 18 channels IP camera inputs, each channel up to 6MP; Max 64 Mbps Incoming Bandwidth > Long transmission distance over coax cable > Up to 8 channels video stream (analog channel) SMD Plus 	۶,۵۴۰,۰۰۰
	DH-XVR5104HS-I3	<ul style="list-style-type: none"> 4 Channels Penta-brid 5M-N/1080P Compact 1U 1HDD WizSense Digital Video Recorder > H.265+/H.265 dual-stream video compression > Supports Full-channel AI-Coding > Supports HDCVI/AHD/TVI/CVBS/IP video inputs > Max 6 channels IP camera inputs, each channel up to 6MP; Max 32 Mbps incoming bandwidth > Up to 2 channels video stream (analog channel) Perimeter Protection > Up to 4 channels video stream (analog channel) SMD Plus > Up to 1 channels video stream (analog channel) human face recognition > IoT & POS functionalities 	۴,۵۷۰,۰۰۰
	DH-XVR5104H-I3	<ul style="list-style-type: none"> 4CH Penta-brid 5MP Value/1080P Mini 1U 1HDD WizSense Digital Video Recorder > 4-ch SMD Plus for analog channel to achieve accurate alarm for human and vehicles. > 4-ch Perimeter Protection for analog channel to detect tripwire and intrusion violation powered by AI. > 1-ch Face Recognition for analog channel to realize face comparison. > 4-ch AI Coding to save storage and bandwidth costs while maintaining target details. > Supports HDCVI/AHD/TVI/CVBS/IP video inputs. > Up to 6-ch IP camera inputs and each channel supports up to 6 MP. Max 32 Mbps incoming bandwidth. > Smart H.265+/H.265 dual-stream video compression. > IoT & POS functionalities. 	۴,۹۰۰,۰۰۰
	DH-XVR5104H-I2	<ul style="list-style-type: none"> 4 Channel Penta-brid 5M-N/1080P Mini 1U 1HDD WizSense Digital Video Recorder > H.265+/H.265 dual-stream video compression > Supports HDCVI/AHD/TVI/CVBS/IP video inputs > Max 6 channels IP camera inputs, each channel up to 6MP; Max 32 Mbps incoming bandwidth > Up to 2 channels video stream (analog channel) Perimeter Protection > Up to 4 channels video stream (analog channel) SMD Plus > Up to 1 channel video stream (analog channel) human face recognition > IoT & POS functionalities 	۴,۲۰۰,۰۰۰
	DH-XVR5104HS-4KL-I3	<ul style="list-style-type: none"> 4 Channels Penta-brid 4K-N/5MP Compact 1U 1HDD WizSense Digital Video Recorder > H.265+/H.265 dual-stream video compression > Supports all-channels AI Coding > Supports HDCVI/AHD/TVI/CVBS/IP video inputs > Max 8 channels IP camera inputs, each channel up to 8MP; Max 64 Mbps incoming bandwidth > Up to 4 channels video stream (analog channel) Perimeter Protection > Up to 4 channels video stream (analog channel) SMD Plus > Up to 1 channel video stream (analog channel) human face recognition > IoT & POS functionalities 	۶,۶۷۰,۰۰۰
	DH-XVR5104H-4KL-I3	<ul style="list-style-type: none"> 4CH Penta-brid 4K Value/5MP Mini 1U 1HDD WizSense Digital Video Recorder > H.265+/H.265 dual-stream video compression. > Supports all-channel AI Coding. > Supports HDCVI/AHD/TVI/CVBS/IP video inputs. > Max 8 channels IP camera inputs, each channel up to 8MP; Max 64 Mbps incoming bandwidth. > Up to 4 channels video stream (analog channel) perimeter protection. > Up to 4 channels video stream (analog channel) SMD plus. > Up to 2 channels video stream (analog channel) human face recognition. > IoT & POS functionalities. 	۶,۹۷۰,۰۰۰

HDCVI RECORDER

تصویر	مدل	مشخصات	قیمت
	DH-XVR5104H-4KL-I2	<ul style="list-style-type: none"> 4 Channel Penta-brid 4K-N/5MP Mini 1U 1HDD WizSense Digital Video Recorder > H.265+/H.265 dual-stream video compression > Supports HDCVI/AHD/TVI/CVBS/IP video inputs > Max 8 channels IP camera inputs, each channel up to 8MP; Max 64 Mbps incoming bandwidth > Up to 2 channels video stream (analog channel) Perimeter Protection > Up to 4 channels video stream (analog channel) SMD Plus > Up to 2 channels video stream (analog channel) human face recognition > IoT & POS functionalities 	۷,۷۷۰,۰۰۰
	DH-XVR5108HS-I3	<ul style="list-style-type: none"> 8 Channels Penta-brid 5M-N/1080P Compact 1U 1HDD WizSense Digital Video Recorder > H.265+/H.265 dual-stream video compression > Supports HDCVI/AHD/TVI/CVBS/IP video inputs > Max 12 channels IP camera inputs, each channel up to 6MP; Max 64 Mbps incoming bandwidth > Up to 2 channels video stream (analog channel) Perimeter Protection > Up to 8 channels video stream (analog channel) SMD Plus > Up to 1 channels video stream (analog channel) human face recognition > IoT & POS functionalities 	۶,۸۸۰,۰۰۰
	DH-XVR5108H-I3	<ul style="list-style-type: none"> 8CH Penta-brid 5MP Value/1080P Mini 1U 1HDD WizSense Digital Video Recorder > H.265+/H.265 dual-stream video compression. > Supports all-channel AI Coding. > Supports HDCVI/AHD/TVI/CVBS/IP video inputs. > Max 12 channels IP camera inputs, each channel up to 6MP; Max 64 Mbps incoming bandwidth. > Up to 4 channels video stream (analog channel) Perimeter Protection. > Up to 8 channels video stream (analog channel) SMD Plus. > Up to 2 channels video stream (analog channel) human face recognition. > IoT & POS functionalities. 	۷,۳۰۰,۰۰۰
	DH-XVR5108HS-4KL-I3	<ul style="list-style-type: none"> 8 Channels Penta-brid 4K-N/5MP Compact 1U 1HDD WizSense Digital Video Recorder > H.265+/H.265 dual-stream video compression. > Supports Full-channel AI Coding. > Supports HDCVI/AHD/TVI/CVBS/IP video inputs. > Max 16 channels IP camera inputs, each channel up to 8MP; Max 128 Mbps incoming bandwidth. > Up to 8 channels video stream (analog channel) Perimeter Protection. > Up to 8 channels video stream (analog channel) SMD Plus. > Up to 2 channels video stream (analog channel) human face recognition. > IoT & POS functionalities. 	۱۱,۴۵۰,۰۰۰
	DH-XVR5108H-4KL-I2	<ul style="list-style-type: none"> 8 Channel Penta-brid 4K-N/5MP Mini 1U 1HDD WizSense Digital Video Recorder > H.265+/H.265 dual-stream video compression > Supports HDCVI/AHD/TVI/CVBS/IP video inputs > Max 16 channels IP camera inputs, each channel up to 8MP; Max 128 Mbps incoming bandwidth > Up to 2 channels video stream (analog channel) Perimeter Protection > Up to 8 channels video stream (analog channel) SMD Plus > Up to 2 channels video stream (analog channel) human face recognition > IoT & POS functionalities 	۷,۸۰۰,۰۰۰
	DH-XVR5116HS-I3	<ul style="list-style-type: none"> 16CH Penta-brid 5MP Value/1080P Compact 1U 1HDD WizSense Digital Video Recorder > H.265+/H.265 dual-stream video compression > Supports Full-channel AI Coding > Supports HDCVI/AHD/TVI/CVBS/IP video inputs > Max 24 channels IP camera inputs, each channel up to 6MP; Max 128 Mbps incoming bandwidth > Up to 4 channels video stream (analog channel) Perimeter Protection > Up to 16 channels video stream (analog channel) SMD Plus > Up to 2 channels video stream (analog channel) human face recognition > IoT & POS functionalities 	۱۱,۵۵۰,۰۰۰
	DH-XVR5116H-4KL-I3	<ul style="list-style-type: none"> 16CH Penta-brid 4K Value/5MP Mini 1U 1HDD WizSense Digital Video Recorder > H.265+/H.265 dual-stream video compression. > Supports Full-channel AI-Coding. > Supports HDCVI/AHD/TVI/CVBS/IP video inputs. > Max 32 channels IP camera inputs, each channel up to 8MP; Max 128 Mbps incoming bandwidth. > Up to 8 channels video stream (analog channel) Perimeter Protection. > Up to 16 channels video stream (analog channel) SMD Plus. > Up to 2 channels video stream (analog channel) human face recognition. > IoT & POS functionalities. 	۱۵,۷۵۰,۰۰۰
	DH-XVR5216AN-I3	<ul style="list-style-type: none"> 16CH Penta-brid 5MP Value/1080P 1U 2HDDs WizSense Digital Video Recorder > H.265+/H.265 dual-stream video compression > Supports Full-channel AI Coding > Supports HDCVI/AHD/TVI/CVBS/IP video inputs > Max 24 channels IP camera inputs, each channel up to 6MP; Max 128 Mbps incoming bandwidth > Up to 4 channels video stream (analog channel) Perimeter Protection > Up to 16 channels video stream (analog channel) SMD Plus > Up to 2 channels video stream (analog channel) human face recognition > IoT & POS functionalities 	۱۵,۰۷۰,۰۰۰


HDCVI RECORDER

تصویر	مدل	مشخصات	قیمت
 <p>WizSense</p>	<p>DH-XVR5216AN-4KL-I3</p> 	<p>16 Channels Penta-brid 4K-N/5MP 1U 2HDDs WizSense Digital Video Recorder</p> <ul style="list-style-type: none"> > H.265+/H.265 dual-stream video compression. > Supports Full-channel AI-Coding. > Supports HDCVI/AHD/TVI/CVBS/IP video inputs. > Max 32 channels IP camera inputs, each channel up to 8MP; Max 128 Mbps incoming bandwidth. > Up to 8 channels video stream (analog channel) Perimeter Protection. > Up to 16 channels video stream (analog channel) SMD Plus. > Up to 2 channels video stream (analog channel) human face recognition. > IoT & POS functionalities. 	۲۴,۲۶۰,۰۰۰
	<p>DH-XVR5232AN-S2</p> 	<p>32 Channel Penta-brid 1080P Digital Video Recorder</p> <ul style="list-style-type: none"> > Embedded processor > H.264+/H.264 dual-stream video compression > Support HDCVI/AHD/TVI/CVBS/IP video inputs > Max 32 channels IP camera inputs; Max 128Mbps Incoming Bandwidth > Long transmission distance over coax cable > Support 2 SATA HDD, up to 16TB 	۱۹,۸۵۰,۰۰۰
 <p>WizSense</p>	<p>DH-XVR5232AN-I3</p> 	<p>32 Channels Penta-brid 5M-N/1080P 1U 2HDDs WizSense Digital Video Recorder</p> <ul style="list-style-type: none"> > H.265+/H.265 dual-stream video compression. > Supports 16-channel AI-Coding. > Supports HDCVI/AHD/TVI/CVBS/IP video inputs. > Max 32 channels IP camera inputs, each channel up to 6MP; Max 128 Mbps incoming bandwidth. > Up to 4 channels video stream (analog channel) Perimeter Protection. > Up to 16 channels video stream (analog channel) SMD Plus. > Up to 2 channels video stream (analog channel) human face recognition. > IoT & POS functionalities. 	۲۳,۳۵۰,۰۰۰
 <p>WizSense</p>	<p>DH-XVR5432L-I3</p> 	<p>32CH Penta-brid 5MP Value/1080P 1.5U 4HDDs WizSense Digital Video Recorder</p> <ul style="list-style-type: none"> > H.265+/H.265 dual-stream video compression. > Supports 16-channel AI-Coding. > Supports HDCVI/AHD/TVI/CVBS/IP video inputs. > Max 32 channels IP camera inputs, each channel up to 8MP; Max 128 Mbps incoming bandwidth. > Up to 8 channels video stream (analog channel) perimeter protection. > Up to 16 channels video stream (analog channel) SMD plus. > Up to 2 channels video stream (analog channel) human face recognition. > IoT & POS functionalities. 	تماس گرفته شود

WWW.SANAT-AMN.COM

الکترونیك صنعت امن

SANAT AMN ELECTRONIC

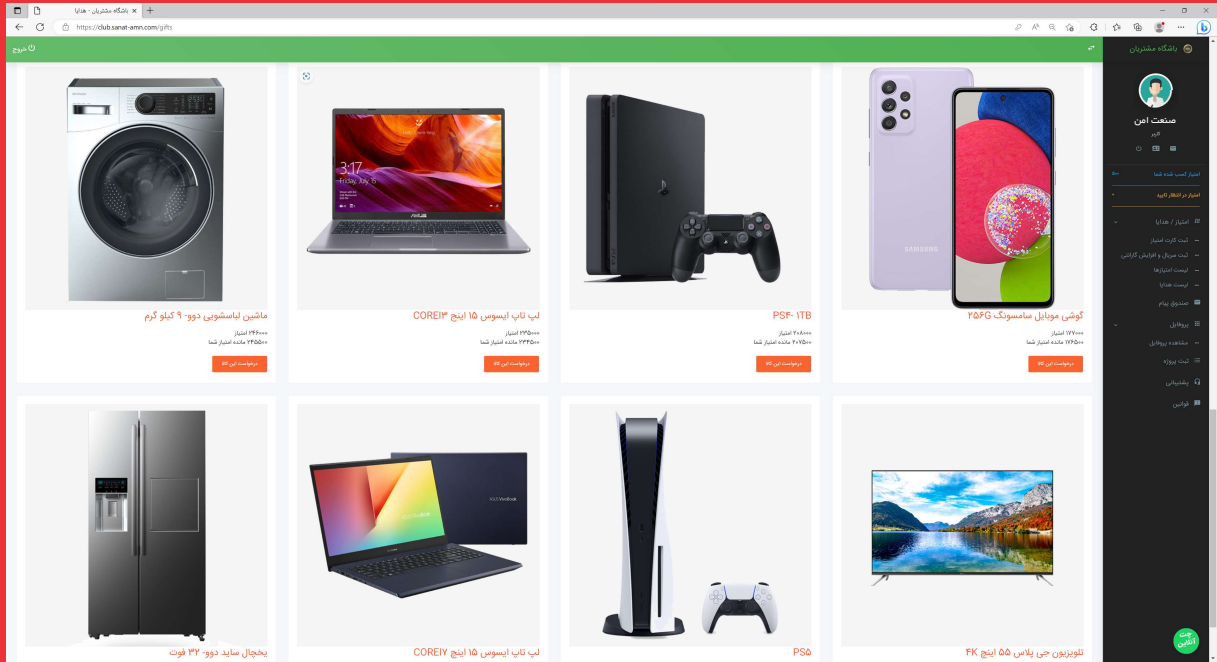

با خرید و ثبت کد با تگ ماه متتریان
صنعت امن از هدایای ویژه بهره مند شوید

