

الکترونیک
منعتامن

SANAT AMN ELECTRONIC

@lhua
TECHNOLOGY


NETWORK

PRODUCT PRICE LIST

با خرید محصولات صنعت امن
از باشگاه مشتریان صنعت امن
هدیه دریافت نمایید



NETWORK CAMERA

تصویر	مدل	مشخصات	قیمت
	DH-IPC-HFW1020SP	<ul style="list-style-type: none"> 1MP IR Mini-Bullet Network Camera > 1/4" 1Megapixel progressive CMOS > H.264+ & H.264 dual-stream encoding > 25/30fps@720P(1280x720) > DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS > 2.8 mm fixed lens (3.6mm optional) > Max IR LEDs Length 30m > IP67, PoE 	۲,۵۰۰,۰۰۰
	DH-IPC-HFW1200SP	<ul style="list-style-type: none"> 2MP Full HD Network Small IR-Bullet Camera > 1/3" 2Megapixel progressive scan CMOS > H.264 & MJPEG dual-stream encoding > 25/30fps@1080P(1920x1080) > DWDR, Day/Night(ICR), AWB, AGC, BLC > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS > 3.6mm fixed lens (6mm optional) > Max. IR LEDs Length 30m > IP66 Protection 	۴,۶۰۰,۰۰۰
	DH-IPC-HFW1230S1P	<ul style="list-style-type: none"> 2MP Entry IR Fixed-Focal Bullet Network Camera > 2MP, 1/2.8" CMOS image sensor, low illumination, high image definition > Outputs max. 2MP (1920 x 1080) @25/30 fps > H.265 codec, high compression rate, ultra-low bit rate > Built-in efficient IR illuminator, and the max. illumination distance is 30 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, DWDR, 3D NR, HLC, BLC, digital watermarking > Abnormality detection: Motion detection, video tampering, network disconnection, IP conflict, illegal access > 12V DC/PoE power supply > IP67 protection 	۳,۵۰۰,۰۰۰
	DH-IPC-HFW1230S1P-A	<ul style="list-style-type: none"> 2 MP Entry IR Fixed-focal Bullet Network Camera > 2-MP 1/2.8" CMOS image sensor, low luminance, and high definition image. > H.265 codec, high compression rate, ultra-low bit rate > Outputs max. 2 MP (1920 x 1080)@25/30 fps > Abnormality detection: Motion detection, video tampering, network disconnection, IP conflict, audio detection and illegal access > Built-in MIC. > Max IR LEDs Length 30m > 12V DC/PoE power support > IP67 	۳,۱۵۰,۰۰۰
	DH-IPC-HFW1230SP	<ul style="list-style-type: none"> 2MP IR Mini-Bullet Network Camera > 1/2.7" 2Megapixel progressive CMOS > H.265& H.264 dual-stream encoding > 25/30fps@1080P(1920x1080) > DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS > 2.8 mm fixed lens (3.6mm optional) > Max IR LEDs Length 30m > IP67, PoE 	۳,۱۵۰,۰۰۰
	DH-IPC-HFW2220RP-ZS	<ul style="list-style-type: none"> 2MP Full HD Network IR Bullet Camera > 1/2.8" 2Megapixel progressive CMOS > H.264 & MJPEG dual-stream encoding > 25/30fps@1080P(1920x1080) > DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS > 2.7"-12mm varifocal lens > Max IR LEDs Length 60m > IP67, PoE 	۴,۱۰۰,۰۰۰
	DH-IPC-HFW2231SP-S	<ul style="list-style-type: none"> 2MP Lite IR Fixed-focal Bullet Network Camera > 2MP 1/2.8" CMOS image sensor, low luminance, and high definition image. > Outputs max. 2MP (1920 x 1080) @25/30 fps. > H.265 codec, high compression rate, ultra-low bit rate. > Built-in IR LED, and the max. illumination distance is 30 m. > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent monitoring: Intrusion, tripwire. > Abnormality detection: Motion detection, privacy masking, no SD card, SD card full, SD card error, network disconnection, IP conflict, illegal access, and voltage detection. > Max. 256 G micro SD card. > 12V DC/PoE power supply. > IP67 protection 	۴,۱۰۰,۰۰۰
	DH-IPC-HFW2231TP-ZS	<ul style="list-style-type: none"> 2MP Lite IR Vari-focal Bullet Network Camera > 2MP, 1/2.8" CMOS image sensor, low illumination, high image definition > Outputs 2MP (1920 x 1080)@25/30 fps > H.265 codec, high compression rate, ultra-low bit rate > Built-in IR LED, max IR distance: 60 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, no SD card, SD card full, SD card error, network disconnected, IP conflict, illegal access, voltage detection > Max. 256 GB Micro SD card > 12V DC/PoE power supply > IP67 protection ,IK10 protection (optional) 	۵,۱۵۰,۰۰۰









NETWORK CAMERA

تصویر	مدل	مشخصات	قیمت
	DH-IPC-HFW3241EP-AS	<p>2MP IR Fixed focal Bullet WizSense Network Camera</p> <ul style="list-style-type: none"> > 2MP, 1/2.8" CMOS image sensor, low illuminance, high image definition > Outputs max. 2MP (1920 × 1080)@30 fps > H.265 codec, high compression rate, low bit rate > Built-in IR LED, max. IR distance: 50 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D DNR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, scene changing, audio abnormality detection, no SD card, SD card full, SD card error, network disconnection, IP conflict, illegal access, voltage detection > Alarm: In, out; Audio: In, out; Supports max. 256 G Micro SD card, built-in Mic > 12V DC/POE power supply > IP67 protection > SMD Plus 	۶,۹۳۰,۰۰۰
	DH-IPC-HFW3241TP-ZS	<p>2MP IR Vari-focal Bullet WizSense Network Camera</p> <ul style="list-style-type: none"> > 2MP, 1/2.8" CMOS image sensor, low illuminance, high image definition > Outputs max. 2MP (1920 × 1080)@30 fps > H.265 codec, high compression rate, low bit rate > Built-in IR LED, max. IR distance: 60 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D DNR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, scene changing, no SD card, SD card full, SD card error, network disconnection, IP conflict, illegal access, voltage detection > Supports max. 256 G Micro SD card > 12V DC/POE power supply > IP67, IK10(optional) protection > SMD Plus 	۶,۹۳۰,۰۰۰
	DH-IPC-HFW3241TP-ZAS	<p>2MP IR Vari-focal Bullet WizSense Network Camera</p> <ul style="list-style-type: none"> > 2MP, 1/2.8" CMOS image sensor, low illuminance, high image definition > Outputs max. 2MP (1920 × 1080)@30 fps > H.265 codec, high compression rate, low bit rate > Built-in IR LED, max. IR distance: 60 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D DNR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, scene changing, audio abnormality detection, no SD card, SD card full, SD card error, network disconnection, IP conflict, illegal access, voltage detection > Alarm: In, out; Audio: In, out; Supports max. 256 G Micro SD card > 12V DC/POE power supply > IP67, IK10(optional) protection > SMD Plus 	۷,۲۵۰,۰۰۰
	DH-IPC-HFW4230MP-4G-AS-I2	<p>2MP 4G IR Bullet Network Camera</p> <ul style="list-style-type: none"> > 1/2.9" 2Megapixel progressive CMOS > H.265&H.264 dual-stream encoding > 25/30fps@2M(1920×1080) > Day/Night(ICR), 3DNR, AWB, AGC, BLC > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS > Micro SD card slot, up to 256GB > 3.6mm, 6mm fixed lens > Max. IR LEDs Length 40m > 4G supported - > IP67 	۶,۲۰۰,۰۰۰
	DH-IPC-HFW4231EP-S	<p>2MP WDR IR Mini Bullet Network Camera</p> <ul style="list-style-type: none"> > 1/2.8" 2Megapixel progressive scan STARVIS™ CMOS > H.265&H.264 triple-stream encoding > 50/60fps@1080P(1920×1080) > Smart Detection supported > WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS > 3.6mm fixed lens (6mm optional) > Max. IR LEDs Length 40m > Micro SD Memory, IP67, PoE 	۴,۱۰۰,۰۰۰
	DH-IPC-HFW4231EP-SE	<p>2MP WDR IR Mini Bullet Network Camera</p> <ul style="list-style-type: none"> > 1/2.8" 2Megapixel progressive scan STARVISTM CMOS > H.265&H.264 triple-stream encoding > 50/60fps@1080P(1920×1080) > Smart Detection supported > WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS > Intelligent IVS: Tripwire, Intrusion, Object Abandoned/Missing > Advanced Intelligent Functions: Face Detection > 3.6mm fixed lens (6mm optional) > Max. IR LEDs Length 40m > Micro SD Memory > IP67 Protection, PoE 	۴,۱۰۰,۰۰۰
	DH-IPC-HFW4231BP-AS	<p>2MP HD WDR Network LXIR Bullet Camera</p> <ul style="list-style-type: none"> > 1/2.8" 2Megapixel progressive scan CMOS > H.265 & H.264 & MJPEG triple stream encoding > Max 25/30fps@2M(1920×1080) > Smart Detecti on supported > WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC > Multi ple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS > 3.6mm fi xed lens (6mm opti onal) > 1/1 Alarm in/out, 1/1 audio in/out(only for -AS) > Max. IR LEDs Length 50m > Micro SD memory (only for -AS), IP67, PoE 	۴,۱۰۰,۰۰۰
	DH-IPC-HFW5241EP-S	<p>2MP WDR IR Bullet AI Network Camera</p> <ul style="list-style-type: none"> > 1/2.8" 2Megapixel progressive scan STARVIS™ CMOS > H.265&H.264 triple-stream encoding > 25/30fps@1080P(1920×1080) > WDR(120dB), Day/Night(ICR), 3D DNR, AWB, AGC, BLC > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS > 2.8mm fixed lens (3.6mm/6mm optional) > Max. IR LEDs Length 45m > Micro SD memory, IP67 	۵,۱۵۰,۰۰۰

NETWORK CAMERA

تصویر	مدل	مشخصات	قیمت
	DH-IPC-HFW5241TP-AS-PV	<p>2MP IR Fixed-focal Bullet WizMind Network Camera</p> <ul style="list-style-type: none"> > 2-MP 1/2.8" CMOS image sensor, low luminance, and high definition image. > Outputs max. 2 MP (1920 × 1080) @30 fps. > H.265 codec, high compression rate, ultra-low bit rate. > Built-in IR LED, and the max. illumination distance is 60 m. > ROI, SMART H.264+/H.265+/AI H.264/H.265, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent monitoring: Intrusion, tripwire, fast moving; abandoned object, missing object, loitering detection, people gathering, parking detection and heat map. > Abnormality detection: Motion detection, video tampering, scene changing, audio detection, SD card error, network disconnection, IP conflict, illegal access, and voltage detection. > Sound and light alarm linkage > Alarm: 1 in, 1 out; audio: 1 in, 1 out; supports max. 256 G Micro SD card; built in speaker. > 12 VDC/PoE power supply, easy for installation. > IP67 and IK10 protection. > SMD 3.0 	۷,۸۸۰,۰۰۰
	DH-IPC-HFW5231EP-ZE	<p>2MP WDR IR Bullet Network Camera</p> <ul style="list-style-type: none"> > 1/2.8" 2Megapixel progressive scan STARVIS™ CMOS > H.265&H.264 triple-stream encoding > 50/60fps@1080P(1920x1080) > Smart Detection supported > WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS > 5.3mm ~64mm 12x zoom lens > 2/1 Alarm in/out, 1/1 audio in/out > Max. IR LEDs Length 200m > Micro SD memory, IP67, IK10, PoE 	۷,۲۵۰,۰۰۰
	DH-IPC-HFW8231EP-ZE	<p>2MP WDR IR Bullet Network Camera</p> <ul style="list-style-type: none"> > 1/2.8" 2Megapixel progressive scan STARVIS™ CMOS > H.265&H.264 triple-stream encoding > 50/60fps@1080P(1920x1080) > WDR(140dB), Day/Night(ICR), 3DNR,AWB,AGC,BLC > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS > 2.7mm ~12mm zoom lens > Max. IR LEDs Length 50m > Micro SD memory,IP67,IK10,PoE+ 	۱۱,۵۵۰,۰۰۰
	DH-IPC-HFW8231EP-Z5	<p>2MP WDR IR Vari-focal Bullet Network Camera</p> <ul style="list-style-type: none"> > 1/2.8" 2Megapixel progressive scan STARVIS™ CMOS > H.265&H.264 triple-stream encoding > 50/60fps@1080P(1920x1080) > WDR(140dB), Day/Night(ICR), 3DNR,AWB,AGC,BLC > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS > 7mm ~35mm zoom lens > Max. IR LEDs Length 100m > Micro SD memory > IP67,IK10,PoE+ 	۱۱,۶۰۰,۰۰۰
	DH-IPC-HFW8231EP-Z5E	<p>2MP WDR IR Bullet Network Camera</p> <ul style="list-style-type: none"> > 1/2.8" 2Megapixel progressive scan STARVIS™ CMOS > H.265&H.264 triple-stream encoding > 50/60fps@1080P(1920x1080) > WDR(140dB), Day/Night(ICR), 3DNR,AWB,AGC,BLC > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS > 7mm ~35mm zoom lens > Max. IR LEDs Length 100m > Micro SD memory,IP67,IK10,PoE+ 	۱۱,۶۰۰,۰۰۰
	DH-IPC-HFW8231EP-ZHE	<p>2MP WDR IR Vari-focal Bullet Network Camera</p> <ul style="list-style-type: none"> > 1/2.8" 2Megapixel progressive scan STARVIS™ CMOS > H.265&H.264 triple-stream encoding > 50/60fps@1080P(1920x1080) > WDR(140dB), Day/Night(ICR), 3DNR,AWB,AGC,BLC > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS > 2.7mm ~12mm zoom lens > Max. IR LEDs Length 50m > Micro SD memory > IP67,IK10,PoE+ 	۱۱,۶۰۰,۰۰۰
	DH-IPC-HF8232FP	<p>2MP Starlight Box Network Camera</p> <ul style="list-style-type: none"> > 1/1.8" 2Megapixel progressive scan CMOS > H.265&H.264 triple-stream encoding > 50/60fps@1080P(1920x1080) > WDR(120dB), Day/Night(ICR), 3DNR,AWB,AGC,BLC > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS > Auto back focus(ABF) > Micro SD memory, PoE 	تماس گرفته شود
	DH-IPC-HF8281EP	<p>2MP Starlight Ultra-smart Network Camera</p> <ul style="list-style-type: none"> > 1/1.9" 2 Megapixel progressive scan Exmor CMOS > Support H.264,MJPEG dual codec > Smart triple streams supported > Max 50/60ps@1080P(1920x1080) > Ultra WDR (Wide Dynamic Range) up to 120db > Ultra 3D DNR, Excellent performance under low illumination > Ultra Defog, ROI, EIS > Smart detection > Intelligent Function > Auto back focus(ABF) > Micro SD memory, PoE 	تماس گرفته شود

NETWORK CAMERA

تصویر	مدل	مشخصات	قیمت
	DH-IPC-HFW1300SP	<p>3MP Full HD Network Small IR-Bullet Camera</p> <ul style="list-style-type: none"> > 1/3" 3Megapixel progressive scan CMOS > H.264 & MJPEG dual-stream encoding > Max 20fps@3M(2048x1536)&25/30fps@1080P(1920x1080) > DWDR, Day/Night(ICR), AWB, AGC, BLC > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS > 3.6mm fixed lens (6mm optional) > Max. IR LEDs Length 30m > IP66 Protection 	۴,۸۰۰,۰۰۰
	DH-IPC-HFW1320SP-W	<p>3MP IR Mini-Bullet Wi-Fi Network Camera</p> <ul style="list-style-type: none"> > 1/3" 3Megapixel progressive CMOS > H.264 & MJPEG dual-stream encoding > 20fps@3M(2304x1296)25/30fps@2M(1920x1080) > DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS > Wi-Fi support > 2.8 mm fixed lens (3.6mm optional) > Max IR LEDs Length 30m > IP67 	۴,۸۰۰,۰۰۰
	DH-IPC-HFW1435SP-W	<p>4MP IR Bullet Wi-Fi Camera</p> <ul style="list-style-type: none"> > 4MP, 1/3" CMOS image sensor, low illuminance, high image definition > Outputs max. 4MP (2560 x 1440) @20 fps > H.265 codec, high compression rate, ultra-low bit rate > Max. IR distance: 30 m > ROI, SMART H.264/H.265, flexible coding > Rotation mode, DWDR, 3D DNR, HLC, BLC, digital watermarking, > Supports 256 G Micro SD card · 12V DC power supply, easy for installation > IP67 protection > Supports Wi-Fi 	۳,۱۰۰,۰۰۰
	DH-IPC-HFW2431SP-S	<p>4MP Lite IR Fixed-focal Bullet Network Camera</p> <ul style="list-style-type: none"> > 4MP, 1/3" CMOS image sensor, low illuminance, high image definition > Outputs 4MP (2560 x 1440)@25/30fps, Max. supports 4MP (2688 x 1520)@20 fps > H.265 codec, high compression ration, ultra-low bit rate > Built-in IR LED, max IR distance: 30 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, no SD card, SD card full, SD card error, network disconnected, IP conflict, illegal access, voltage detection > Supports max. 256 GB Micro SD card > 12V DC/PoE power supply > IP67 protection 	۴,۹۵۰,۰۰۰
	DH-IPC-HFW2441SP-S	<p>4MP IR Fixed-focal Bullet WizSense Network Camera</p> <ul style="list-style-type: none"> > 4-MP 1/2.9" CMOS image sensor, low luminance, and high definition image. > Outputs max. 4 MP (2688 x 1520)@20 fps, and supports 2560 x 1440 (2560 x 1440)@25/30 fps. > H.265 codec, high compression rate, ultra-low bit rate. > Built-in IR LED, and the max. illumination distance is 30 m. > ROI, SMART H.264 +/H.265+, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent monitoring: Intrusion, tripwire (the two functions support the classification and accurate detection of vehicle and human) > Supports max. 256 G Micro SD card; built in MIC. > 12 VDC/PoE power supply. > IP67 protection. > SMD Plus. 	۴,۹۵۰,۰۰۰
	DH-IPC-HFW2431TP-ZS	<p>4MP Lite IR Vari-focal Bullet Network Camera</p> <ul style="list-style-type: none"> > 4MP, 1/3" CMOS image sensor, low illuminance, high image definition > Outputs 4MP (2560 x 1440)@25/30 fps, max. supports 4MP (2688 x 1520)@20 fps > H.265 codec, high compression rate, ultra-low bit rate > Built-in IR LED, max IR distance: 60 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, no SD card, SD card full, SD card error, network disconnected, IP conflict, illegal access, voltage detection > Supports max. 256 GB Micro SD card > 12V DC/PoE power supply > IP67 protection, IK10 protection (optional) 	۸,۸۲۰,۰۰۰
	DH-IPC-HFW2441TP-ZS	<p>4MP IR Vari-focal Bullet WizSense Network Camera</p> <ul style="list-style-type: none"> > 4-MP 1/2.9" CMOS image sensor, low luminance, and high definition image. > Outputs max. 4 MP (2688 x 1520)@20 fps, and supports 2560 x 1440 (2560 x 1440)@25/30 fps. > H.265 codec, high compression rate, ultra-low bit rate. > Built-in IR LED, and the max. illumination distance is 60 m. > ROI, SMART H.264 +/H.265+, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent monitoring: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, audio detection, no SD card, SD card full, SD card error, network disconnection, IP conflict, illegal access, and voltage detection. > supports max. 256 G Micro SD card; built in MIC. > 12 VDC/PoE power supply, easy for installation. > IP67, IK10 (optional) protection. > SMD Plus. 	۸,۹۳۰,۰۰۰
	DH-IPC-HFW3441EP-S	<p>4 MP IR Fixed-focal Bullet WizSense Network Camera</p> <ul style="list-style-type: none"> > 4-MP 1/2.9" CMOS image sensor > Outputs max. 4 MP (2688 x 1520) @25/30 fps. > H.265 codec, high compression rate, ultra-low bit rate. > Built-in IR LED, max. IR distance: 50 m. > ROI, SMART H.264 +/H.265+, AI H.264/H.265, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, privacy masking, scene changing, audio detection, SD card error, network disconnection, IP conflict, illegal access, and voltage detection. > max. 256 G Micro SD card. built-in Mic. > 12 VDC/PoE power supply facilitates installation. > IP67 protection. > SMD 4.0, AI SSA. 	۷,۷۷۰,۰۰۰









NETWORK CAMERA

تصویر	مدل	مشخصات	قیمت
	DH-IPC-HFW3441TP-AS-P	<p>4MP Wide Angle Fixed Bullet WizSense Network Camera</p> <ul style="list-style-type: none"> > 4-MP 1/2.7" CMOS starlight-grade image sensor, low luminance, and high definition image. > Outputs 4 MP (2688 × 1520) @25/30 fps, and supports max. 5 MP(2880 × 1620) @20 fps. > H.265 codec, high compression rate, ultra-low bit rate. > Built-in IR LED, and the max. illumination distance is 20 m. > ROI, SMART H.264+/H.265+, AI H.264/H.265, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent monitoring: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, scene changing, audio detection, SD card error, network disconnection, IP conflict, illegal access, and voltage detection > Alarm: 1 in, 1 out; audio: 1 in, 1 out; supports max. 256 G Micro SD card; built in MIC. > 12 VDC/PoE power supply. > IP67 protection. > EPTZ: Enlarge and track the targets of intelligent alarms. 	۹,۲۴۰,۰۰۰
	DH-IPC-HFW4431TP-S	<p>4MP WDR IR Mini Bullet Network Camera</p> <ul style="list-style-type: none"> > 1/3" 4Megapixel progressive scan CMOS > H.265&H.264 triple-stream encoding > 25/30fps@4M(2688×1520) > Smart Detection supported > WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS > 3.6mm fixed lens (6mm, 8mm, 12mm optional) > Max. IR LEDs Length 80m > Micro SD memory, IP67, IK10, PoE 	۸,۳۰۰,۰۰۰
	DH-IPC-HFW5442EP-S	<p>4MP WDR IR Bullet AI Network Camera</p> <ul style="list-style-type: none"> > 1/1.8" 4Megapixel progressive scan CMOS > H.265&H.264 triple-stream encoding > 25/30fps@2688×1520 > WDR(120dB), Day/Night(ICR), 3D DNR, AWB, AGC, BLC > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS > 2.8mm fixed lens (3.6mm/6mm optional) > Max. IR LEDs Length 50m > Micro SD memory, IP67 	۷,۰۷۰,۰۰۰
	DH-IPC-HFW5442HP-ZE	<p>4MP Vari-focal Bullet WizMind Network Camera</p> <ul style="list-style-type: none"> > 4MP, 1/1.8" CMOS image sensor, low illuminance, high image definition > Outputs max. 4MP (2688 × 1520) @30 fps > Max. IR distance: 60 m > ROI, SVC, SMART H.264+/H.265+, AI H.264/H.265, AI H.264/H.265, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes > Alarm: 3 in, 2 out; audio: 1 in, 1 out; supports max. 256 G Micro SD card > 12V DC/PoE power supply > ePoE, IP67, IK10 protection > Anti-corrosion coating (optional) > Supports junction box mount > SMD 3.0 	۱۲,۲۰۰,۰۰۰
	DH-IPC-HFW2531SP-S	<p>5MP Lite IR Fixed-focal Bullet Network Camera</p> <ul style="list-style-type: none"> > 5MP, 1/2.7" CMOS image sensor, low illuminance, high image definition > Outputs max. 5MP (2592 × 1944) @20 fps, and supports 2688 × 1520 (2688 × 1520) @25/30 fps > H.265 codec, high compression rate, ultra-low bit rate > Built-in IR LED, max IR distance: 30 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, no SD card, SD card full, SD card error, network disconnected, IP conflict, illegal access, voltage detection > Supports max. 256 GB Micro SD card > 12V DC/PoE power supply > IP67 protection 	۵,۸۸۰,۰۰۰
	DH-IPC-HFW2541SP-S	<p>5MP IR Fixed-focal Bullet WizSense Network Camera</p> <ul style="list-style-type: none"> > 5-MP 1/2.7" CMOS image sensor, low luminance, and high definition image. > Outputs max. 5 MP (2960 × 1668) @20 fps, and supports 2688 × 1520 (2688 × 1520) @25/30 fps. > H.265 codec, high compression rate, ultra-low bit rate. > Built-in IR LED, and the max. illumination distance is 30 m. > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent monitoring: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, audio detection, no SD card, SD card full, SD card error, network disconnection, IP conflict, illegal access, and voltage detection. > Supports max. 256 G Micro SD card; built in MIC. > 12 VDC/PoE power supply. > IP67 protection. >SMD Plus. 	۶,۳۰۰,۰۰۰
	DH-IPC-HFW2531TP-AS	<p>5MP Lite IR Fixed-focal Bullet Network Camera</p> <ul style="list-style-type: none"> > 5MP, 1/2.7" CMOS image sensor, low illuminance, high image definition > Outputs max. 5MP (2592 × 1944) @20 fps, and supports 2688 × 1520 (2688 × 1520) @25/30 fps > H.265 codec, high compression rate, ultra-low bit rate > Built-in IR LED, max IR distance: 80 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, no SD card, SD card full, SD card error, network disconnection, IP conflict, illegal access, local alarm, voltage & audio detection > Alarm: 1 in, 1 out; audio: 1 in, 1 out; supports max. 256 GB Micro SD card > 12V DC/POE power support supply > IP67 protection, IK10 protection (optional) 	۷,۳۵۰,۰۰۰
	DH-IPC-HFW2531TP-ZS-S2	<p>5MP Lite IR Vari-focal Bullet Network Camera</p> <ul style="list-style-type: none"> > 5MP, 1/2.7" CMOS image sensor, low illuminance, high image definition > Outputs max. 5MP (2592 × 1944) @20 fps, and supports 2688 × 1520 (2688 × 1520) @25/30 fps > H.265 codec, high compression rate, ultra-low bit rate > Built-in IR LED, max IR distance: 60 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, no SD card, SD card full, SD card error, network disconnected, IP conflict, illegal access, voltage detection > Supports max. 256 GB Micro SD card > 12V DC/PoE power supply > IP67 protection 	۹,۲۸۰,۰۰۰

NETWORK CAMERA

تصویر	مدل	مشخصات	قیمت
	DH-IPC-HFW3541EP-AS	<p>5MP IR Vari-focal Bullet WizSense Network Camera</p> <ul style="list-style-type: none"> > 5MP, 1/2.7" CMOS image sensor, low illumination, high image definition > Outputs max. 5MP (2592 × 1944) @20 fps, and supports 4MP (2688 × 1520) @25/30 fps > H.265 codec, high compression rate, low bit rate. > Built-in IR LED, max. IR distance: 50 m. > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, scene changing, audio abnormality detection, SD card error, network disconnection, IP conflict, illegal access, voltage detection > Alarm: In, out; Audio: In, out; Supports max. 256 G Micro SD card, built-in Mic > 12 VDC/PoE power supply > IP67 	۹,۲۴۰,۰۰۰
	DH-IPC-HFW3541TP-ZS	<p>5MP IR Vari-focal Bullet WizSense Network Camera</p> <ul style="list-style-type: none"> > 5-MP 1/2.7" CMOS image sensor, excellent low luminance performance and high definition of images. > Outputs max. 5 MP (2960 × 1668) @20 fps and supports 4MP (2688 × 1520) @25/30 fps. > H.265 codec, high compression rate, ultra-low bit rate. > Built-in IR LED, max. IR distance: 60 m. > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, privacy masking, scene changing, audio detection, SD card error, network disconnection, IP conflict, illegal access, and voltage detection. > max. 256 G Micro SD card, built-in Mic. > 12 VDC/PoE power supply, easy for installation. > IP67, IK10 (optional) protection. > SMD 4.0, AI SSA. 	۹,۴۵۰,۰۰۰
	DH-IPC-HFW5541EP-S	<p>5MP Pro AI IR Fixed-focal Bullet Network Camera</p> <ul style="list-style-type: none"> > 1/2.7" 5Megapixel progressive scan CMOS > H.265 & H.264 triple-stream encoding > 20 fps@2592 × 1944, 50/60 fps@1080P (1920 × 1080) > WDR (120 dB), Day/Night (ICR), 3D DNR, AWB, AGC, BLC > Multiple network monitoring: Web viewer, CMS (DSS/PSS) & DMSS > 2.8 mm fixed lens (3.6 mm, 6.0 mm optional) > Max. IR LEDs Length 50 m > Micro SD memory, IP67 	۱۱,۳۴۰,۰۰۰
	DH-IPC-HFW2841SP-S	<p>8MP IR Fixed-focal Bullet WizSense Network Camera</p> <ul style="list-style-type: none"> > 8-MP 1/2.7" CMOS image sensor, low luminance, and high definition image. > Outputs max 8 MP (3840 × 2160) @20 fps, and supports 2688 × 1520 (2688 × 1520) @25/30 fps. > H.265 codec, high compression rate, ultra-low bit rate. > Built-in IR LED, and the max. illumination distance is 30 m. > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent monitoring: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, audio detection, SD card error, network disconnection, IP conflict, illegal access, and voltage detection. > Supports max. 256 G Micro SD card; built in MIC. > 12 VDC/PoE power supply. > IP67 protection. > SMD Plus. 	۸,۰۰۰,۰۰۰
	DH-IPC-HFW2831TP-ZS	<p>8MP Lite IR Vari-focal Bullet Network Camera</p> <ul style="list-style-type: none"> > 8MP, 1/2.7" CMOS image sensor, low illumination, high image definition > Outputs max. 8MP (3840 × 2160) @15 fps, and supports 2688×1520 (2688 × 1520) @25/30 fps > H.265 codec, high compression rate, ultra-low bit rate > Built-in IR LED, max IR distance: 60 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, no SD card, SD card full, SD card error, network disconnection, IP conflict, illegal access, voltage detection > Supports max. 256 GB Micro SD card > 12V DC/PoE power supply > IP67 protection 	۱۲,۶۰۰,۰۰۰
	DH-IPC-HFW2841TP-ZS	<p>8MP IR Vari-focal Bullet WizSense Network Camera</p> <ul style="list-style-type: none"> > 8-MP 1/2.7" CMOS image sensor, low luminance, and high definition image. > Outputs max. 8 MP (3840 × 2160) @20 fps, and supports 2688×1520 (2688 × 1520) @25/30 fps. > H.265 codec, high compression rate, ultra-low bit rate. > Built-in IR LED, and the max. illumination distance is 60 m. > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent monitoring: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, audio detection, no SD card, SD card full, SD card error, network disconnection, IP conflict, illegal access, and voltage detection. > supports max. 256 G Micro SD card; built in MIC. > 12 VDC/PoE power supply, easy for installation. > IP67, IK10 (optional) protection. > SMD Plus. 	۱۲,۶۰۰,۰۰۰
	DH-IPC-HFW5842EP-ZE	<p>8MP IR Vari-focal Bullet WizMind Network Camera</p> <ul style="list-style-type: none"> > 8-MP 1/1.8" CMOS image sensor, low luminance, and high definition image. > Outputs max. 8MP (3840×2160) @25/30 fps. > Built-in IR LED, and the max. illumination distance is 60 m. > ROI, SVC, SMART H.264+/H.265+, AI H.264/H.265, encoding after filter, flexible coding, applicable to various bandwidth and storage environments. > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes. > With deep learning algorithm, it supports: video metadata, smart sound detection, IVS, face detection, smart object detection, and people counting, etc. > Alarm: 2 in, 1 out; audio: 1 in, 1 out; supports max. 512 GB Micro SD card, built-in MIC. > 12 VDC/PoE power supply; ePoE. > IP67 and IK10 protection. 	۲۲,۱۶۰,۰۰۰
	DH-IPC-HFW7842HP-Z	<p>8MP IR Bullet WizMind Network Camera</p> <ul style="list-style-type: none"> > 8MP, 1/1.8" CMOS image sensor, low illumination, high image definition > Max outputs 8MP (3840×2160) @25fps/30fps > H.264&H.265 coding, high compression ration > Wide dynamic, day/ night, 3D NR, AWB, HLC, BLC > ROI, SVC, SMART H.264+/H.265+, flexible coding > With deep learning algorithm, it supports people counting, face detection, perimeter protection etc > Alarm: 3 in, 2 out; audio: 1 in, 1 out; RS-485; BNC; supports max. 256 G SD card > 24V AC/12V DC/PoE power supply > Five streams for three-channel HD video > IP67, IK10 protection grade > Anti-corrosion coating(optional) > 12V DC power output, max. current 165mA, easy for installation 	۲۵,۲۰۰,۰۰۰

NETWORK CAMERA

تصویر	مدل	مشخصات	قیمت
	DH-IPC-HF81200EP	<p>12 Megapixel Ultra HD Network Camera</p> <ul style="list-style-type: none"> > 1/1.7" 12 Megapixel progressive scan CMOS > Support H.264/MJPEG dual codec > Smart triple streams supported > Max 15fps@12MP(4000x3000) > Defog, ROI, EIS > Auto back focus > Built-in Mic > 100/1000M Base-T Ethernet 	تماس گرفته شود
	DH-IPC-HDW1230T1P	<p>2MP IR Eyeball Network Camera</p> <ul style="list-style-type: none"> > 2MP, 1/2.7" CMOS image sensor, low illumination, high image definition > Outputs max. 2MP (1920 × 1080p) @25/30 fps > H.265 codec, high compression rate, ultra-low bit rate > Built-in IR LED, max. IR distance: 30 m > ROI, SMART H.264/H.265, flexible coding > Rotation mode, DWDR, 3D DNR, HLC, BLC, digital watermarking, applicable to various monitoring scenes > Abnormality detection: Motion detection, video tampering, network disconnection, IP conflict, illegal access > 12V DC/PoE power support > IP67 protection 	۳,۰۵۰,۰۰۰
	DH-IPC-HDW1230T1P-A	<p>2 MP Entry IR Fixed-focal Eyeball Network Camera</p> <ul style="list-style-type: none"> > 2-MP 1/2.8" CMOS image sensor, low luminance, and high definition image > H.265 codec, high compression rate, ultra-low bit rate. > Outputs max. 2 MP (1920 × 1080)@25/30 fps > DWDR, Day/Night(ICR), 3DNR, HLC, AGC, BLC > Abnormality detection: Motion detection, video tampering, network disconnection, IP conflict, illegal access > Max IR LEDs Length 30m > 12V DC/PoE power support > Built-in MIC. > IP67 	۳,۳۶۰,۰۰۰
	DH-IPC-HDW2230TP-AS-S2	<p>2MP IR Eyeball Network Camera</p> <ul style="list-style-type: none"> > 2MP, 1/2.7" CMOS image sensor, low illumination, high image definition > Outputs 2MP (1920 × 1080)@25/30 fps > H.265 coding, high compression ration, low bit rate > Built-in IR LED, max IR distance: 30 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, DWDR, 3D NR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, no SD card, SD card full, SD card error, network disconnected, IP conflict, illegal access, voltage detection > Supports max. 256 GB Micro SD card and built-in Mic > 12V DC/PoE power supply > IP67 protection 	۴,۴۱۰,۰۰۰
	DH-IPC-HDBW2230EP-S	<p>2MP Lite IR Fixed-focal Dome Network Camera</p> <ul style="list-style-type: none"> > 2MP 1/2.8" CMOS image sensor, low luminance, and high definition image. > Outputs max. 2MP (1920 × 1080) @25/30 fps. > H.265 codec, high compression rate, ultra-low bit rate. > Built-in IR LED, and the max. illumination distance is 30 m. > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, DWDR, 3D NR, HLC, BLC, digital watermarking > Intelligent monitoring: Intrusion, tripwire. > Abnormality detection: Motion detection, privacy masking, no SD card, SD card full, SD card error, network disconnection, IP conflict, illegal access, and voltage detection. > Max. 256 G micro SD card. > 12V DC/PoE power supply. > IP67, IK10 protection. 	۴,۱۰۰,۰۰۰
	DH-IPC-HDW2231TP-AS-S2	<p>2MP Lite IR Fixed-focal Eyeball Network Camera</p> <ul style="list-style-type: none"> > 2MP, 1/2.8" CMOS image sensor, low illumination, high image definition > Outputs max. 2MP (1920 × 1080) @25/30 fps > H.265 codec, high compression rate, ultra-low bit rate > Built-in IR LED, max. IR distance: 30 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, no SD card, SD card full, SD card error, network disconnection, IP conflict, illegal access, voltage detection > Max. 256 GB Micro SD card, built-in Mic > 12V DC/PoE power supply > IP67 protection 	۵,۰۸۰,۰۰۰
	DH-IPC-HDW2231RP-ZS	<p>2MP IR Eyeball Network Camera</p> <ul style="list-style-type: none"> > 1/2.8" 2Megapixel progressive Starvis™ CMOS > H.265& H.264 dual-stream encoding > 25/30fps@1080p(1920x1080) > WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS > Micro SD card slot, up to 128GB > 2.7"-13.5mm varifocal lens > Max IR LEDs Length 50m > IP67, PoE 	۵,۱۵۰,۰۰۰
	DH-IPC-HDW2231TP-ZS	<p>2MP Lite IR Vari-focal Eyeball Network Camera</p> <ul style="list-style-type: none"> > 2MP, 1/2.8" CMOS image sensor, low illumination, high image definition > Outputs 2MP (1920 × 1080)@25/30 fps > H.265 codec, high compression rate, ultra-low bit rate > Built-in IR LED, max IR distance: 40 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, no SD card, SD card full, SD card error, network disconnected, IP conflict, illegal access, voltage detection > Max. 256 GB Micro SD card > 12V DC/PoE power supply > IP67 protection 	۴,۱۰۰,۰۰۰









NETWORK CAMERA

تصویر	مدل	مشخصات	قیمت
	DH-IPC-HDBW2231RP-ZS	<p>2MP Lite IR Vari-focal Dome Network Camera</p> <ul style="list-style-type: none"> > 2MP 1/2.8" CMOS image sensor, low luminance, and high definition image. > Outputs max. 2MP (1920 × 1080) @25/30 fps. > H.265 codec, high compression rate, ultra-low bit rate. > Built-in IR LED, and the max. illumination distance is 40 m. > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent monitoring: Intrusion, tripwire. > Abnormality detection: Motion detection, privacy masking, no SD card, SD card full, SD card error, network disconnection, IP conflict, illegal access, and voltage detection. > Max. 256 G micro SD card. > 12V DC/PoE power supply. > IP67, IK10 protection. 	۴,۶۲۰,۰۰۰
	DH-IPC-HDBW3241EP-S	<p>2MP IR Fixed focal Dome WizSense Network Camera</p> <ul style="list-style-type: none"> > 2MP, 1/2.8" CMOS image sensor, low illuminance, high image definition > Outputs max. 2MP (1920 × 1080)@30 fps > H.265 codec, high compression rate, low bit rate > Built-in IR LED, max. IR distance: 50 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D DNR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, scene changing, no SD card, SD card full, SD card error, network disconnection, IP conflict, illegal access, voltage detection > Supports max. 256 G Micro SD card > 12V DC/POE power supply > IP67, IK10 protection > SMD Plus 	۵,۱۵۰,۰۰۰
	DH-IPC-HDBW3241FP-AS-M	<p>2MP IR Fixed focal Dome WizSense Network Camera</p> <ul style="list-style-type: none"> > 2MP, 1/2.8" CMOS image sensor, low illuminance, high image definition > Outputs max. 2MP (1920 × 1080)@30 fps > H.265 codec, high compression rate, low bit rate > Built-in IR LED, max. IR distance: 30 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D DNR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, scene changing, audio detection, SD card error, network disconnection, IP conflict, illegal access, voltage detection > Supports max. 256 G Micro SD card, built-in Mic > 12V DC/POE power supply > IP67, IK10 protection > SMD Plus 	۵,۲۰۰,۰۰۰
	DH-IPC-HDBW3241EP-AS	<p>2MP IR Fixed focal Dome WizSense Network Camera</p> <ul style="list-style-type: none"> > 2MP, 1/2.8" CMOS image sensor, low illuminance, high image definition > Outputs max. 2MP (1920 × 1080)@30 fps > H.265 codec, high compression rate, low bit rate > Built-in IR LED, max. IR distance: 50 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D DNR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, scene changing, audio abnormality detection, SD card error, network disconnection, IP conflict, voltage detection > Alarm: In, out; Audio: In, out; Supports max. 256 G Micro SD card > 12V DC/POE power supply > IP67, IK10 protection > SMD Plus 	۵,۳۶۰,۰۰۰
	DH-IPC-HDW3241TP-ZAS	<p>2MP IR Vari-focal Eyeball WizSense Network Camera</p> <ul style="list-style-type: none"> > 2MP, 1/2.8" CMOS image sensor, low illuminance, high image definition > Outputs max. 2MP (1920 × 1080)@30 fps > H.265 codec, high compression rate, low bit rate > Built-in IR LED, max. IR distance: 40 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D DNR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, scene changing, audio detection, SD card error, network disconnection, IP conflict, illegal access, voltage detection > Supports max. 256 G Micro SD card, built-in Mic > 12V DC/POE power supply > IP67 protection > SMD Plus 	۶,۲۰۰,۰۰۰
	DH-IPC-HDBW3241RP-ZS	<p>2MP IR Vari-focal Dome WizSense Network Camera</p> <ul style="list-style-type: none"> > 2MP, 1/2.8" CMOS image sensor, low illuminance, high image definition > Outputs max. 2MP (1920 × 1080)@30 fps > H.265 codec, high compression rate, low bit rate > Built-in IR LED, max. IR distance: 40 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D DNR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, scene changing, no SD card, SD card full, SD card error, network disconnection, IP conflict, illegal access, voltage detection > Supports max. 256 G Micro SD card > 12V DC/POE power supply > IP67, IK10 protection > SMD Plus 	۵,۱۵۰,۰۰۰
	DH-IPC-HDW4231MP	<p>2MP IR Eyeball Network Camera</p> <ul style="list-style-type: none"> > 1/2.8" 2Megapixel progressive scan STARVISTM CMOS > H.265&H.264 triple-stream encoding > 50/60fps@1080P(1920×1080) > Smart Detection supported > WDR(120dB), Day/Night(ICR), 3DNR,AWB,AGC,BLC > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS > 3.6mm fixed lens (6mm optional) > Max. IR LEDs Length 30m > IP67, PoE 	۴,۱۰۰,۰۰۰
	DH-IPC-HDBW4231EP-ASE	<p>2MP IR Mini Dome Network Camera</p> <ul style="list-style-type: none"> > 1/2.8" 2Megapixel progressive scan STARVIS™ CMOS > H.265&H.264 triple-stream encoding > 50/60fps@1080P(1920×1080) > Smart Detection supported > WDR(120dB), Day/Night(ICR), 3DNR,AWB,AGC,BLC > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS > 2.8mm fixed lens (3.6mm, 6mm optional) > 1/1 Alarm in/out, 1/1 audio in/out > Max. IR LEDs Length 30m > Micro SD memory, IP67, IK10, PoE 	۴,۱۰۰,۰۰۰

NETWORK CAMERA

تصویر	مدل	مشخصات	قیمت
	DH-IPC-HDB4231GP-AS	2MP HD Recessed Mount Dome Network Camera > 1/2.8" 2Megapixel progressive StarvisTM CMOS > H.265&H.264 triple-stream encoding > 50/60fps@1080P(1920x1080) > Smart Detection supported > WDR(120dB), Day/Night(ICR), 3DNR,AWB,AGC,BLC > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS > 2.8mm fixed lens (3.6mm optional) > Built-in Mic > Micro SD memory, IK08, PoE	۳,۱۰۰,۰۰۰
	DH-IPC-HDBW4231FP-AS	2MP IR Mini Dome Network camera > 1/2.8" 2Megapixel progressive scan Exmor CMOS > H.265&H.264 triple-stream encoding > 50/60fps@2M(1920x1080) > Smart Detection supported > WDR(120dB), Day/Night(ICR), 3DNR,AWB,AGC,BLC > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS > 3.6mm fixed lens (2.8mm, 6mm optional) > Max. IR LEDs Length 20m, built-in Mic > Micro SD memory, IP67, IK10, PoE	۳,۰۵۰,۰۰۰
	DH-IPC-HDW5241TMP-AS	2MP WDR IR Eyeball AI Network Camera > 1/2.8" 2Megapixel progressive scan STARVIS™ CMOS > H.265 & H.264 triple-stream encoding > 25/30 fps@1080P (1920 × 1080) > WDR (120 dB), Day/Night (ICR), 3D NR, HLC, BLC, digital watermarking > Multiple network monitoring: Web viewer, CMS (DSS/PSS) & DMSS > 2.8 mm fixed lens (3.6 mm, 6.0 mm optional) > Built-in MIC > Max. IR LEDs Length 50 m > Micro SD memory, IP67	۴,۷۳۰,۰۰۰
	DH-IPC-HDW5241HP-AS-PV	2MP IR Fixed-focal Eyeball WizMind Network Camera > 2-MP 1/2.8" CMOS image sensor, low luminance, and high definition image. > Outputs max. 2 MP (1920 × 1080)@30 fps. > H.265 codec, high compression rate, ultra-low bit rate. > Built-in IR LED, and the max. illumination distance is 50 m. > ROI, SMART H.264 +/H.265+ AI H.264/H.265, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent monitoring: Intrusion, tripwire, fast moving; abandoned object, missing object, loitering detection, people gathering, parking detection and heat map. > Abnormality detection: Motion detection, video tampering, scene changing, audio detection, SD card error, network disconnection, IP conflict, illegal access, and voltage detection. > Sound and light alarm linkage. When the alarm is triggered, the sound and light will be linked. > Alarm: 1 in, 1 out; audio: 1 in, 1 out; supports max. 256 G Micro SD card; built in MIC and speaker, support two-way talk. > 12 VDC/PoE power supply, easy for installation. > IP67 protection. > SMD 3.0.	۶,۲۰۰,۰۰۰
	DH-IPC-HDBW5241RP-ASE	2MP IR Fixed-focal Dome WizMind Network Camera > 2-MP 1/2.8" CMOS image sensor, low luminance, and high definition image. > Outputs max. 2MP (1920x1080) @25/30fps. > Built-in IR LED, and the max. illumination distance is 50 m. > ROI, SVC, SMART H.264+/H.265+, AI H.264/H.265, encoding after filter, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > With deep learning algorithm, it supports: video metadata, smart sound detection, IVS, face detection, smart object detection, and people counting, etc. > Alarm: 1 in, 1 out; audio: 1 in, 1 out; supports max. 256 G Micro SD card; built-in MIC. > 12 VDC/PoE power supply; ePoE. > IP67 and IK10 protection. > SMD 3.0.	۴,۲۰۰,۰۰۰
	DH-IPC-HDBW4300EP	3MP Full HD Network Small IR Dome Camera > 1/3" 3Megapixel progressive scan CMOS > H.264&MJPEG dual-stream encoding > Max 20fps@3M(2052x1536), 25/30fps@1080P(1920x1080) > DWDR, Day/Night(ICR), 3DNR,AWB,AGC,BLC > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS > 3.6mm fixed lens (2.8mm, 6mm optional) > Max. IR LEDs Length 20m > IP66, IK10, PoE	۲,۵۰۰,۰۰۰
	DH-IPC-HDB4300FP-PT	3 Megapixel Full HD Network Mini PT Dome Camera > 1/3" 3Megapixel progressive scan CMOS > H.264 & MJPEG dual-stream encoding > Max 20fps@3M(2048x1536), 25/30fps@1080P > Day/Night(Electronic), 3DNR, AWB,AGC,BLC > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS > Max 100°/s preset speed, ±180°Pan range, 90°Tilt range > 3.6mm fixed lens > Micro SD memory, IP66, IK10	تماس گرفته شود
	DH-IPC-HDW2431TP-AS	4MP Lite IR Fixed-focal Eyeball Network Camera > 4MP, 1/3" CMOS image sensor, low illuminance, high image definition > Outputs 4MP (2560 × 1440)@25/30 fps, Max. supports 4MP (2688 × 1520) @ 20 fps > H.265 coding, high compression ration, low bit rate > Built-in IR LED, max IR distance: 30 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, no SD card, SD card full, SD card error, network disconnected, IP conflict, illegal access, voltage detection > Max. 256 GB SD card and built-in Mic > 12V DC/POE power supply	۴,۸۳۰,۰۰۰

NETWORK CAMERA

تصویر	مدل	مشخصات	قیمت
	DH-IPC-HDW2431TMP-AS	<p>4MP Lite IR Fixed-focal Eyeball Network Camera</p> <ul style="list-style-type: none"> > 4MP, 1/3" CMOS image sensor, low illuminance, high image definition > Outputs 4MP (2560 × 1440)@25/30 fps, Max. supports 4MP (2688 × 1520) @ 20 fps > H.265 codec, high compression rate, ultra-low bit rate > Built-in IR LED, max IR distance: 30 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, no SD card, SD card full, SD card error, network disconnected, IP conflict, illegal access, voltage detection > Supports max. 256 GB Micro SD card, built-in Mic > 12V DC/POE power supply > IP67 protection 	۵,۵۷۰,۰۰۰
	DH-IPC-HDBW2431EP-S-S2	<p>4MP Lite IR Fixed-focal Dome Network Camera</p> <ul style="list-style-type: none"> > 4MP, 1/3" CMOS image sensor, low illuminance, high image definition > Outputs 4MP (2560 × 1440)@25/30 fps, max. supports 4MP (2688 × 1520) @ 20 fps > H.265 codec, high compression rate, ultra-low bit rate > Built-in IR LED, max IR distance: 30 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, no SD card, SD card full, SD card error, network disconnected, IP conflict, illegal access, voltage detection > Supports max. 256 GB Micro SD card > 12V DC/PoE power supply > IP67, IK10 protection 	۵,۱۵۰,۰۰۰
	DH-IPC-HDW2441TP-S	<p>4MP IR Fixed-focal Eyeball WizSense Network Camera</p> <ul style="list-style-type: none"> > 4-MP 1/2.9" CMOS image sensor, low luminance, and high definition image. > Outputs max. 4 MP (2688 × 1520)@20 fps, and supports 2560 × 1440@25/30 fps. > H.265 codec, high compression rate, ultra-low bit rate. > Built-in IR LED, and the max. illumination distance is 30 m. > ROI, SMART H.264 +/H.265+, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent monitoring: Intrusion, tripwire > Supports max. 256 G Micro SD card; built in MIC. > 12 VDC/PoE power supply. > IP67 protection. > SMD Plus. 	۵,۰۴۰,۰۰۰
	DH-IPC-HDW2431RP-ZS	<p>4MP IR Eyeball Network Camera</p> <ul style="list-style-type: none"> > 1/3" 4Megapixel progressive CMOS > H.265& H.264 dual-stream encoding > 20fps@4M(2688×1520)&25/30fps@3M(2304×1296) > WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS > Micro SD card slot, up to 128GB > 2.7~13.5mm varifocal lens > Max IR LEDs Length 50m > IP67, PoE 	۷,۳۰۰,۰۰۰
	DH-IPC-HDW2431TP-ZS-S2	<p>4MP Lite IR Vari-focal Eyeball Network Camera</p> <ul style="list-style-type: none"> > 4MP, 1/3" CMOS image sensor, low illuminance, high image definition > Outputs 4MP (2560 × 1440)@25/30 fps, max. supports 4MP (2688 × 1520)@20 fps > H.265 codec, high compression rate, ultra-low bit rate > Built-in IR LED, max IR distance: 40 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, no SD card, SD card full, SD card error, network disconnected, IP conflict, illegal access, voltage detection > Supports max. 256 GB Micro SD card > 12V DC/PoE power supply > IP67 protection 	۷,۳۰۰,۰۰۰
	DH-IPC-HDBW2431RP-ZS	<p>4MP Lite IR Vari-focal Dome Network Camera</p> <ul style="list-style-type: none"> > 4MP, 1/3" CMOS image sensor, low illuminance, high image definition > Outputs 4MP (2560 × 1440)@25/30 fps, Max. supports 4MP (2688 × 1520)@20 fps > H.265 codec, high compression rate, ultra-low bit rate > Built-in IR LED, max IR distance: 40 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, no SD card, SD card full, SD card error, network disconnected, IP conflict, illegal access, voltage detection > Supports max. 256 GB Micro SD card > 12V DC/PoE power supply > IP67, IK10 protection 	۷,۳۰۰,۰۰۰
	DH-IPC-HDW3441TMP-AS	<p>4MP IR Fixed focal Eyeball WizSense Network Camera</p> <ul style="list-style-type: none"> > 4MP, 1/3" CMOS image sensor, low illuminance, high image definition > Outputs max. 4MP (2688 × 1520) @30 fps > H.265 codec, high compression rate, low bit rate > Built-in IR LED, max. IR distance: 50 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D DNR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, scene changing, audio detection, SD card error, network disconnection, IP conflict, illegal access, voltage detection > Supports max. 256 G Micro SD card, built-in Mic > 12V DC/POE power supply > IP67 protection > SMD Plus 	۶,۲۰۰,۰۰۰
	DH-IPC-HDW3441EMP-AS	<p>4MP IR Fixed focal Eyeball WizSense Network Camera</p> <ul style="list-style-type: none"> > 4MP, 1/3" CMOS image sensor, low illuminance, high image definition > Outputs max. 4MP (2688 × 1520) @30 fps H.265 codec, high compression rate, low bit rate > Built-in IR LED, max. IR distance: 50 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D DNR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, scene changing, audio detection, no SD card, SD card full, SD card error, network disconnection, IP conflict, illegal access, voltage detection > Supports max. 256 G Micro SD card, built-in Mic > 12V DC/POE power supply > IP67 protection > SMD Plus 	۶,۲۰۰,۰۰۰






NETWORK CAMERA

تصویر	مدل	مشخصات	قیمت
	DH-IPC-HDW3441TP-ZAS	<p>4MP IR Vari-focal Eyeball WizSense Network Camera</p> <ul style="list-style-type: none"> > 4MP, 1/3" CMOS image sensor, low illumination, high image definition > Outputs max. 4MP (2688 × 1520)@30 fps > H.265 codec, high compression rate, low bit rate > Built-in IR LED, max. IR distance: 40 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D DNR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, scene changing, audio detection, SD card error, net work disconnection, IP conflict, illegal access, voltage detection > Supports max. 256 G Micro SD card, built-in Mic > 12V DC/PoE power supply > IP67 protection > SMD Plus 	۷,۹۰۰,۰۰۰
	DH-IPC-HDBW3441RP-ZAS	<p>4MP IR Vari-focal Dome WizSense Network Camera</p> <ul style="list-style-type: none"> > 4MP, 1/3" CMOS image sensor, low illumination, high image definition > Outputs max. 4MP (2688 × 1520)@30 fps > H.265 codec, high compression rate, low bit rate > Built-in IR LED, max. IR distance: 40 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D DNR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, scene changing, audio abnormality detection, SD card error, network disconnection, IP conflict, voltage detection > Alarm: In, out; Audio: In, out; Supports max. 256 G Micro SD card > 12V DC/PoE power supply > IP67, IK10 protection > SMD Plus 	۷,۸۸۰,۰۰۰
	DH-IPC-HDBW3441RP-ZS	<p>4MP IR Vari-focal Dome WizSense Network Camera</p> <ul style="list-style-type: none"> > 4MP, 1/3" CMOS image sensor, low illumination, high image definition > Outputs max. 4MP (2688 × 1520)@30 fps > H.265 codec, high compression rate, low bit rate > Built-in IR LED, max. IR distance: 40 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D DNR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, scene changing, no SD card, SD card full, SD card error, network disconnection, IP conflict, illegal access, voltage detection > Supports max. 256 G Micro SD card > 12V DC/PoE power supply > IP67, IK10 protection > SMD Plus 	۷,۳۰۰,۰۰۰
	DH-IPC-HDW4431MP	<p>4MP IR Eyeball Network Camera</p> <ul style="list-style-type: none"> > 1/3" 4Megapixel progressive scan CMOS > H.265&H.264 triple-stream encoding > 25/30fps@4M(2688×1520) > Smart Detection supported > WDR(120dB), Day/Night(ICR), 3DNR,AWB,AGC,BLC > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS > 2.8mm fixed lens (3.6mm,6mm optional) > Max. IR LEDs Length 30m > IP67, PoE 	۴,۱۰۰,۰۰۰
	DH-IPC-HDBW4431EP-ASE	<p>4MP IR mini Dome Network Camera</p> <ul style="list-style-type: none"> > 1/3" 4Megapixel progressive scan CMOS > H.265&H.264 triple-stream encoding > 25/30fps@4M(2688×1520) > Smart Detection supported > WDR(120dB), Day/Night(ICR), 3DNR,AWB,AGC,BLC > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS > 2.8mm fixed lens (3.6mm, 6mm optional) > 1/1 Alarm in/out, 1/1 audio in/out > Max. IR LEDs Length 30m > Micro SD memory, IP67, IK10, PoE 	۵,۵۵۰,۰۰۰
	DH-IPC-HDW5442TMP-AS	<p>4MP WDR IR Eyeball AI Network Camera</p> <ul style="list-style-type: none"> > 1/1.8" 4Megapixel progressive scan CMOS > H.265 & H.264 triple-stream encoding > 25/30 fps@2688 × 1520, 50/60 fps@1080P (1920 × 1080) > WDR (140 dB), Day/Night (ICR), 3D DNR, AWB, AGC, BLC > Multiple network monitoring: Web viewer, CMS (DSS/PSS) & DMSS > 2.8 mm fixed lens (3.6 mm, 6.0 mm optional) > Built-in MIC > Max. IR LEDs Length 50 m > Micro SD memory, IP67 	۶,۸۳۰,۰۰۰
	DH-IPC-HDW5431RP-ZE	<p>4MP WDR IR Eyeball Network Camera</p> <ul style="list-style-type: none"> > 1/3" 4Megapixel progressive scan CMOS > H.265&H.264 triple-stream encoding > 25/30fps@4Mp(2688×1520) > WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS > 2.7mm ~13.5mm motorized lens > Max. IR LEDs Length 50m > Micro SD card memory, IP67, PoE 	۹,۳۰۰,۰۰۰
	DH-IPC-HDBW5431EP-ZE	<p>4MP WDR IR Dome Network Camera</p> <ul style="list-style-type: none"> > 1/3" 4Megapixel progressive scan CMOS > H.265&H.264 triple-stream encoding > 25/30fps@4Mp(2688×1520) > WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS > 2.7mm ~13.5mm motorized lens > Max. IR LEDs Length 50m > Micro SD card memory, IP67,IK10, PoE+ 	۴,۷۲۰,۰۰۰

NETWORK CAMERA

تصویر	مدل	مشخصات	قیمت
	DH-IPC-HDBW5431EP-Z5E	<p>4MP WDR IR Dome Network Camera</p> <ul style="list-style-type: none"> > 1/3" 4Megapixel progressive scan CMOS > H.265&H.264 triple-stream encoding > 25/30fps@4Mp(2688x1520) > WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS > 7mm ~35mm 5X zoom lens > Max. IR LEDs Length 100m > IP67,IK10, PoE+ > Micro SD card memory 	۶,۲۰۰,۰۰۰
	DH-IPC-HDW2531TP-AS	<p>5MP Lite IR Fixed-focal Eyeball Network Camera</p> <ul style="list-style-type: none"> > 5MP, 1/2.7" CMOS image sensor, low illuminance, high image definition > Outputs max. 5MP (2592 x 1944) @20 fps, and supports 2688 x 1520 (2688 x 1520) @25/30 fps > H.265 codec, high compression rate, ultra-low bit rate > Built-in IR LED, max IR distance: 40 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, no SD card, SD card full, SD card error, network disconnected, IP conflict, illegal access, voltage detection > Supports max. 256 GB Micro SD card, built-in Mic > 12V DC/PoE power supply > IP67 protection 	۶,۵۰۰,۰۰۰
	DH-IPC-HDW2531TMP-AS-S2	<p>5MP Lite IR Fixed-focal Eyeball Network Camera</p> <ul style="list-style-type: none"> > 5MP, 1/2.7" CMOS image sensor, low illuminance, high image definition > Outputs max. 5MP (2592 x 1944) @20 fps, and supports 2688 x 1520 (2688 x 1520) @25/30 fps > H.265 codec, high compression rate, ultra-low bit rate > Built-in IR LED, max IR distance: 30 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, no SD card, SD card full, SD card error, network disconnected, IP conflict, illegal access, voltage detection > Supports max. 256 GB Micro SD card, built-in Mic > 12V DC/PoE power supply > IP67 protection 	۶,۴۰۰,۰۰۰
	DH-IPC-HDW3541TMP-AS	<p>5MP IR Fixed focal Eyeball WizSense Network Camera</p> <ul style="list-style-type: none"> > 5MP, 1/2.7" CMOS image sensor, low illuminance, high image definition > Outputs max. 5MP (2592 x 1944) @20 fps, and supports 4MP (2688 x 1520) @25/30 fps > H.265 codec, high compression rate, low bit rate > Built-in IR LED, max. IR distance: 50 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D DNR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, scene changing, audio detection, SD card error, network disconnection, IP conflict, illegal access, voltage detection > Supports max. 256 G Micro SD card, built-in Mic > 12V DC/POE power supply > IP67 protection > SMD Plus 	۷,۳۰۰,۰۰۰
	DH-IPC-HDBW3541RP-ZS	<p>5MP IR Vari-focal Dome WizSense Network Camera</p> <ul style="list-style-type: none"> > 5MP 1/2.7" CMOS image sensor > Outputs max. 5 MP (2960 x 1668) @20 fps and supports 4MP (2688 x 1520) @25/30 fps. > H.265 codec, high compression rate, ultra-low bit rate. > Built-in IR LED, max. IR distance: 40 m. > ROI, SMART H.264 +/H.265+, AI H.264/H.265, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, privacy masking, scene changing, audio detection, SD card error, network disconnection, IP conflict, illegal access, and voltage detection. > max. 256 G Micro SD card; built-in Mic. > 12 VDC/PoE power supply, easy for installation. > IP67, IK10 protection. > SMD 4.0, AI SSA. 	۸,۲۰۰,۰۰۰
	DH-IPC-HDBW3541RP-ZAS	<p>5MP IR Vari-focal Dome WizSense Network Camera</p> <ul style="list-style-type: none"> > 5MP, 1/2.7" CMOS image sensor, low illuminance, high image definition > Outputs max. 5MP (2592 x 1944) @20 fps, and supports 4MP (2688 x 1520) @25/30 fps > H.265 codec, high compression rate, low bit rate > Built-in IR LED, max. IR distance: 40 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D DNR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, scene changing, audio abnormality detection, SD card error, network disconnection, IP conflict, voltage detection > Alarm: In, out; Audio: In, out; Supports max. 256 G Micro SD card > 12V DC/POE power supply > IP67, IK10 protection > SMD Plus 	۸,۵۰۰,۰۰۰
	DH-IPC-HDW5541H-ASE-VP	<p>5MP Fixed-focal Eyeball WizMind Network Camera</p> <ul style="list-style-type: none"> > 5MP 1/2.7" CMOS image sensor, low illuminance, high definition image > Outputs max. 5MP (2592 x 1944)@20 fps and 2688 x 1520 (2688 x 1520)@25/30 fps > H.265 codec, high compression rate, ultra-low bit rate > Built-in efficient warm light and IR LED, and the Max. IR distance is 50 m > ROI, SMART H.264 +/H.265+, AI H.264/H.265, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Sound and light alarm linkage. When the alarm is triggered, the sound and light will be linked > Supports one-tap disarming. You can disarm the events of alarm output, sending email, audio, and light during the configured period > Alarm: 1 in, 1 out; audio: 1 in, 1 out; supports max. 256 G Micro SD card, built-in Mic and speaker, support two-way talk. > 12V DC/PoE power supply, easy for installation > ePoE, IP67 protection > SMD 3.0 	۹,۰۱۰,۰۰۰
	DH-IPC-HDW2831TP-ZS	<p>8MP Lite IR Vari-focal Eyeball Network Camera</p> <ul style="list-style-type: none"> > 8MP, 1/2.7" CMOS image sensor, low illuminance, high image definition > Outputs max. 8MP (3840 x 2160) @15 fps, and supports 2688x1520(2688x1520) @25/30 fps > H.265 codec, high compression rate, ultra-low bit rate > Built-in IR LED, max IR distance: 40 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, no SD card, SD card full, SD card error, network disconnection, IP conflict, illegal access, voltage detection > Supports max. 256 GB Micro SD card > 12V DC/PoE power supply > IP67 protection 	۱۱,۷۰۰,۰۰۰









NETWORK CAMERA

تصویر	مدل	مشخصات	قیمت
	DH-IPC-HDW3841EMP-AS	<p>8MP IR Fixed focal Eyeball WizSense Network Camera</p> <ul style="list-style-type: none"> > 8MP, 1/2.8" CMOS image sensor, low illuminance, high image definition > Outputs max. 8MP (3840 × 2160) @20 fps (AI function enabled by default) and supports 8MP (3840 × 2160) @25/30 fps (when AI function disabled) > H.265 codec, high compression rate, low bit rate > Built-in IR LED, max. IR distance: 30 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D DNR, HLC, BLC > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, scene changing, audio detection, SD card error, network disconnection, IP conflict, illegal access, and voltage detection > Supports max. 256 G Micro SD card, built-in Mic > 12V DC/PoE power supply > IP67 protection > SMD Plus 	<p>۶,۹۵۰,۰۰۰</p>
	DH-IPC-HDW3841TP-ZAS	<p>8MP IR Vari-focal Eyeball WizSense Network Camera</p> <ul style="list-style-type: none"> > 8MP, 1/2.8" CMOS image sensor, low illuminance, high image definition > Outputs max. 8MP (3840 × 2160) @20 fps (AI function enabled by default) and supports 8MP (3840 × 2160) @25/30 fps (when AI function disabled) > H.265 codec, high compression rate, low bit rate > Built-in IR LED, max. IR distance: 50 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D DNR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, scene changing, audio detection, SD card error, network disconnection, IP conflict, illegal access, and voltage detection > Supports max. 256 G Micro SD card, built-in Mic > 12V DC/PoE power supply > IP67 protection > SMD Plus 	<p>۸,۰۵۰,۰۰۰</p>
	DH-IPC-HDBW3841RP-ZAS	<p>8MP IR Vari-focal Dome WizSense Network Camera</p> <ul style="list-style-type: none"> > 8MP, 1/2.8" CMOS image sensor, low illuminance, high image definition > Outputs max. 8MP (3840 × 2160) @20 fps (AI function enabled by default) and supports 8MP (3840 × 2160) @25/30 fps (when AI function disabled) > H.265 codec, high compression rate, low bit rate > Built-in IR LED, max. IR distance: 40 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D DNR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, scene changing, audio detection, SD card error, network disconnection, IP conflict, illegal access, and voltage detection > Alarm: 1 in, 1 out; audio: 1 in, 1 out > Supports max. 256 G Micro SD card > 12V DC/PoE power supply > IP67, IK10 protection > SMD Plus 	<p>۱۰,۳۳۰,۰۰۰</p>
	DH-IPC-PDB4830P	<p>4x2MP Panoramic Dome Network Camera</p> <ul style="list-style-type: none"> > Four 1/2.8" 2Megapixel progressive scan SSTARVIS™ CMOS > H.265&H.264 dual-stream encoding > 25fps@2M(1920×1080) > DWDR, Day/Night(Electronic), 3DNR, AWB, AGC, BLC > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS > 2.8 mm fixed lens (3.6mm optional) > Micro SD memory > IP67, IK10, PoE 	<p>تماس گرفته شود</p>
	DH-IPC-HDBW81200EP-Z	<p>12Megapixel Ultra HD Network IR Dome Camera</p> <ul style="list-style-type: none"> > 1/1.7" 12Megapixel progressive scan CMOS > Support H.264&MJPEG dual codec > Max 15fps@12Mp(4000×3000),25/30fps@4K(3840×2160) > DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS > 4.1mm ~16.4mm motorized lens > Max. IR LEDs Length 50m > IP67, PoE 	<p>۹,۴۰۰,۰۰۰</p>









FULL COLOR NETWORK CAMERA

تصویر	مدل	مشخصات	قیمت
	DH-IPC-HFW1239S1P-LED	<p>2MP Lite Full-color Fixed-focal Bullet Network Camera</p> <ul style="list-style-type: none"> > 2MP, 1/2.7" CMOS image sensor, low illuminance, high image definition > Outputs max. 2MP (1920 × 1080) @25/30 fps > H.265 codec, high compression rate, ultra-low bit rate > Built-in warm light, and the max. illumination distance is 15 m. > ROI, SMART H.264/H.265, flexible coding > Rotation mode, DWDR, 3D DNR, HLC, BLC, digital watermarking > Abnormality detection: Motion detection, video tampering, network disconnection, IP conflict, illegal access > 12V DC/PoE power support > IP67 protection 	۳,۱۵۰,۰۰۰
	DH-IPC-HFW1239S1P-A-LED	<p>2 MP Entry Full-color Fixed-focal Bullet Network Camera</p> <ul style="list-style-type: none"> > 2-MP 1/2.8" CMOS image sensor, low luminance, and high definition image > H.265 codec, high compression rate, ultra-low bit rate > Outputs max. 2 MP (1920 × 1080)@25/30 fps > Rotation mode, DWDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes > Abnormality detection: Motion detection, video tampering, network disconnection, IP conflict, illegal access > Built-in warm light, and the max. illumination distance is 15 m. > 12V DC/PoE power support > Built-in MIC > IP67 	۳,۳۳۰,۰۰۰
	DH-IPC-HFW3249EP-AS-LED	<p>2MP Full-color Warm LED Bullet WizSense Network Camera</p> <ul style="list-style-type: none"> > 2MP, 1/2.8" CMOS image sensor, low illuminance, high image definition > Outputs max. 2MP (1920 × 1080) @30 fps > H.265 codec, high compression rate, low bit rate > Built-in Warm LED, max. LED distance: 30 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, scene changing, audio detection, no SD card, SD card full, SD card error, network disconnection, IP conflict, illegal access, voltage detection > Alarm: 1 in, 1 out; audio: 1 in, 1 out; supports max. 256 G Micro SD card, built-in Mic > 12V DC/PoE power supply > IP67 protection > SMD Plus 	۴,۹۰۰,۰۰۰
	DH-IPC-HFW3249T1P-AS-PV	<p>2MP Full-color Active Deterrence Fixed-focal Bullet WizSense Network Camera</p> <ul style="list-style-type: none"> > 2MP, 1/2.8" CMOS image sensor, low illuminance, high image definition > Outputs max. 2MP (1920 × 1080) @30 fps > H.265 codec, high compression rate, low bit rate > Built-in warm illuminator, and the max. illumination distance: 40 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, scene changing, audio detection, SD card error, network disconnection, IP conflict, illegal access, and voltage detection.> Supports sound and light alarm linkage > Supports one-tap disarming. You can disarm the events of alarm output, sending email, audio, and light in the configured period. > Alarm:1 in, 1 out;audio:1in,1out;supports max.256 G Micro SD card,built-inMic and speaker > 12V DC/PoE power supply > IP67 protection > SMD Plus> Red and blue flashlight alarm 	۴,۷۳۰,۰۰۰
	DH-IPC-HFW4239TP-ASE-NI	<p>2MP WDR Full-color Starlight Mini Bullet Network Camera</p> <ul style="list-style-type: none"> > 1/2.8" 2Megapixel progressive scan STARVIS™ CMOS > H.265&H.264 triple-stream encoding > 25/30fps@1080P(1920×1080) > Smart Detection supported > WDR(120dB), Day/Night(Electronic), 3DNR, AWB, AGC, BLC > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS > 3.6mm fixed lens (6mm optional) > 1/1 Alarm in/out, 1/1 audio in/out > Micro SD Memory,IP67,IK10, PoE 	۵,۲۰۰,۰۰۰
	DH-IPC-HFW5241TP-AS-LED	<p>2MP WDR Bullet WizMind Network Camera</p> <ul style="list-style-type: none"> > 1/2.8" 2Megapixel progressive scan STARVIS™ CMOS > ROI, SMART H.264+/H.265+, flexible coding > 25/30 fps@1080P (1920 × 1080) > WDR (120 dB), Day/Night (Electronic), 3D DNR, AWB, AGC, BLC > Multiple network monitoring: Web viewer, CMS (DSS/PSS) & DMSS > 2.8 mm fixed lens (3.6 mm, 6.0 mm, 8.0 mm optional) > 1/1 Alarm in/out, 1/1 audio in/out > Max. LEDs Length 25 m > Micro SD memory, IP67,IK10 	۶,۸۳۰,۰۰۰
	DH-IPC-HFW1439S1P-LED	<p>4MP Entry Full-color Fixed-focal Bullet Network Camera</p> <ul style="list-style-type: none"> > 4-MP 1/3" CMOS image sensor, low luminance, and high definition image. > Outputs max. 4 MP (2560 × 1440)@25/30 fps. > H.265 codec, high compression rate, ultra-low bit rate. > Built-in warm light, and the max. illumination distance is 15 m. > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Abnormality detection: Motion detection, video tampering, network disconnection, IP conflict, illegal access, and voltage detection. > 12 VDC/PoE power supply. > IP67 protection. 	۴,۱۰۰,۰۰۰
	DH-IPC-HFW1439S1P-A-LED	<p>4 MP Entry Full-color Fixed-focal Bullet Network Camera</p> <ul style="list-style-type: none"> > 4-MP 1/3" CMOS image sensor, low luminance, and high definition image > H.265 codec, high compression rate, ultra-low bit rate > Outputs max. 4 MP (2560 × 1440)@25/30 fps > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes > Abnormality detection: Motion detection, video tampering, network disconnection, IP conflict, illegal access > Built-in warm light, and the max. illumination distance is 15 m. > 12V DC/PoE power support > Built-in MIC. > IP67 	۴,۲۰۰,۰۰۰

FULL COLOR NETWORK CAMERA

تصویر	مدل	مشخصات	قیمت
	DH-IPC-HFW2439SP-SA-LED	<p>4MP Lite Full-color Fixed-focal Bullet Network Camera</p> <ul style="list-style-type: none"> > 4MP, 1/3" CMOS image sensor, low illumination, high image definition > Outputs 4MP (2560 × 1440) @ 25/30 fps, Max. supports 4MP (2688 × 1520) @ 20 fps > H.265 codec, high compression rate, ultra-low bit rate > Built-in warm lights, max. illumination distance: 30 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, no SD card, SD card full, SD card error, network disconnection, IP conflict, illegal access, voltage detection > Supports max. 256 GB Micro SD card and built-in Mic > 12V DC/PoE power supply > IP67 protection 	۵,۲۵۰,۰۰۰
	DH-IPC-HFW2449SP-S-LED	<p>4MP Full-color Fixed-focal Bullet Wizsense Network Camera</p> <ul style="list-style-type: none"> > 4-MP 1/2.9" CMOS image sensor, low luminance, and high definition image. > Outputs max. 4 MP (2688× 1520)@20 fps, and supports (2560×1440)@25/30 fps. > H.265 codec, high compression rate, ultra-low bit rate. > Built-in warm light and the max. illumination distance is 30 m. · ROI, SMART H.264+/H.265+ > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent monitoring: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, audio detection, no SD card, SD card full, SD card error, network disconnection, IP conflict, illegal access, and voltage detection. > Supports max. 256 G Micro SD card; built in Mic. > 12 VDC/PoE power supply. > IP67 protection. > SMD Plus 	۵,۷۸۰,۰۰۰
	DH-IPC-HFW2449SP-S-IL	<p>4MP Smart Dual Light Fixed-focal Bullet WizSense Network Camera</p> <ul style="list-style-type: none"> > 4-MP 1/2.9" CMOS image sensor, low luminance, and high definition image. > Outputs max. 4 MP (2688 × 1520)@20 fps, and supports 2560 × 1440 @25/30 fps > H.265 codec, high compression rate, ultra-low bit rate. > Built-in warm light/IR LED, the max. illumination distance is 30 m and the max. warm light distance is 30 m. > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent monitoring: Intrusion, tripwire > Supports max. 256 G Micro SD card; built in MIC. > 12 VDC/PoE power supply, easy for installation. > IP67 protection. > SMD Plus. 	۵,۴۸۰,۰۰۰
	DH-IPC-HFW3449EP-AS-LED	<p>4MP Full-color Warm LED Fixed-focal Bullet WizSense Network Camera</p> <ul style="list-style-type: none"> > 4MP, 1/2.7" CMOS image sensor, low illumination, high image definition > Outputs max. 4MP (2688 × 1520) @ 30 fps > H.265 codec, high compression rate, low bit rate > Built-in Warm LED, max. LED distance: 30 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D DNR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, scene changing, audio detection, SD card error, network disconnection, IP conflict, illegal access, voltage detection > Alarm: 1 in, 1 out; audio: 1 in, 1 out; supports max. 256 G Micro SD card, built-in Mic > 12V DC/PoE power support > IP67 protection 	۸,۴۰۰,۰۰۰
	DH-IPC-HFW3449T1P-AS-PV	<p>4MP Smart Dual Light Active Deterrence Fixed-focal Bullet WizSense Network Camera</p> <ul style="list-style-type: none"> > 4-MP 1/2.7" CMOS image sensor, low luminance, and high definition image. > Outputs max. 4 MP (2688 × 1520)@25/30 fps. > H.265 codec, high compression rate, ultra-low bit rate. > Built-in warm light and IR LED; the max. IR illumination distance is 30 m and warm light distance is 30 m. > ROI, SMART H.264+/H.265+, AI H.264/H.265, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent monitoring: Intrusion, tripwire > Abnormality detection: Motion detection, privacy masking, scene changing, audio detection, SD card error, network disconnection, IP conflict, illegal access, and voltage detection. > Alarm: 1 in, 1 out; audio: 1 in, 1 out; supports max. 256 G Micro SD card; built-in dual Mic; built-in speaker; support two-way talk. > 12 VDC/PoE power supply. > IP67 protection. > Sound and light alarm (red and blue lights). > SMD 4.0. > One-tap arming/disarming through alarm input. 	۱۳,۶۰۰,۰۰۰
	DH-IPC-HFW3549EP-AS-LED	<p>5MP Full-color Fixed-focal Warm LED Bullet WizSense Network Camera</p> <ul style="list-style-type: none"> > 5MP, 1/2.7" CMOS image sensor, low illumination, high image definition > Outputs max. 5MP (2592 × 1944) @20 fps, and supports 4MP (2688 × 1520) @25/30 fps > H.265 codec, high compression rate, low bit rate. > Built-in warm light, max. illumination distance: 30 m > ROI, SMART H.264+/H.265+, AI H.264/H.265, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, privacy masking, scene changing, audio detection, SD card error, network disconnection, IP conflict, illegal access, and voltage detection. > Alarm: 1 in, 1 out; audio: 1 in, 1 out; max. 256 G Micro SD card. built-in MIC. > IP67. > 12 VDC/PoE power supply facilitates installation. 	۹,۲۴۰,۰۰۰
	DH-IPC-HFW3549T1P-AS-PV	<p>5MP Smart Dual Light Active Deterrence Fixed-focal Bullet WizSense Network Camera</p> <ul style="list-style-type: none"> > 5-MP 1/2.7" CMOS image sensor, low luminance, and high definition image. > Outputs max. 5 MP (2960 × 1668) @20 fps and supports 4MP (2688 × 1520) @25/30 fps. > H.265 codec, high compression rate, ultra-low bit rate. > Built-in warm light and IR LED; the max. IR illumination distance is 30 m and warm light distance is 30 m. > ROI, SMART H.264+/H.265+, AI H.264/H.265, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent monitoring: Intrusion, tripwire > Abnormality detection: Motion detection, privacy masking, scene changing, audio detection, SD card error, network disconnection, IP conflict > Alarm: 1 in, 1 out; audio: 1 in, 1 out; supports max. 256 G Micro SD card; built-in dual Mic; built-in speaker; support two-way talk. > 12 VDC/PoE power supply. > IP67 protection. > Sound and light alarm (red and blue lights). > SMD 4.0. > One-tap arming/disarming through alarm input. 	۹,۴۵۰,۰۰۰
	DH-IPC-HFW3849T1P-AS-PV	<p>8MP Full-color Active Deterrence Fixed-focal Bullet WizSense Network Camera</p> <ul style="list-style-type: none"> > 8MP, 1/2.8" CMOS image sensor, low illumination, high image definition > Outputs max. 8MP (3840 × 2160) @20 fps (AI function enabled by default) > H.265 codec, high compression rate, low bit rate > ROI, SMART H.264+/H.265+, flexible coding > Built-in warm illuminator, and the max. illumination distance: 30 m > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent detection: Tripwire, intrusion > Abnormality detection: Motion detection, video tampering, scene changing, audio detection, SD card error, network disconnection, IP conflict, illegal access, and voltage detection > Supports sound and light alarm linkage > Supports one-tap disarming, disarm the events of alarm output, sending email, audio, and light > Alarm: 1 in, 1 out; audio: 1 in, 1 out; supports max. 256 G Micro SD card, built-in Mic & speaker > 12V DC/PoE power supply > IP67 protection > Red and blue flashlight alarm 	۱۴,۰۷۰,۰۰۰

FULL COLOR NETWORK CAMERA

تصویر	مدل	مشخصات	قیمت
	DH-IPC-HDW1239T1P-LED	<p>2MP Lite Full-color Fixed-focal Eyeball Network Camera</p> <ul style="list-style-type: none"> > 2MP, 1/2.7" CMOS image sensor, low illumination, high image definition > Outputs max. 2MP (1920 × 1080) @25/30 fps > H.265 codec, high compression rate, ultra-low bit rate > Built-in warm light, and the max. illumination distance is 15 m > ROI, SMART H.264/H.265, flexible coding > Rotation mode, DWDR, 3D DNR, HLC, BLC, digital watermarking > Abnormality detection: Motion detection, video tampering, network disconnection, IP conflict, illegal access > 12V DC/PoE power support > IP67 protection 	۳,۲۶۰,۰۰۰
	DH-IPC-HDW1239T1P-A-LED	<p>2 MP Entry Full-color Fixed-focal Eyeball Network Camera</p> <ul style="list-style-type: none"> > 2-MP 1/2.8" CMOS image sensor, low luminance, and high definition image > H.265 codec, high compression rate, ultra-low bit rate > Outputs max. 2 MP (1920 × 1080)@25/30 fps > Rotation mode, DWDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes > Abnormality detection: Motion detection, video tampering, network disconnection, IP conflict, illegal access > Built-in warm light, and the max. illumination distance is 15 m. > 12V DC/PoE power support > Built-in MIC > IP67 	۳,۴۰۰,۰۰۰
	DH-IPC-HDBW4239RP-ASE-NI	<p>2MP WDR Full-color Starlight Dome Network Camera</p> <ul style="list-style-type: none"> > 1/2.8" 2Megapixel progressive scan STARVIS™ CMOS > H.265&H.264 triple-stream encoding > 25/30fps@1080(1920x1080) > Smart Detection supported > WDR(120dB), Day/Night(Electronic), 3DNR, AWB, AGC, BLC > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS > 3.6mm fixed lens (6mm optional) > 1/1 Alarm in/out, 1/1 audio in/out > Micro SD memory, IP67, IK10, PoE 	۴,۱۰۰,۰۰۰
	DH-IPC-HDW1439T1P-LED	<p>4MP Entry Full-color Fixed-focal Eyeball Network Camera</p> <ul style="list-style-type: none"> > 4-MP 1/3" CMOS image sensor, low luminance, and high definition image. > Outputs max. 4 MP (2560 × 1440)@25/30 fps. > H.265 codec, high compression rate, ultra-low bit rate. > Built-in warm light, and the max. illumination distance is 15 m. > ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments. > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes. > Abnormality detection: Motion detection, video tampering, network disconnection, IP conflict, illegal access, and voltage detection. > 12 VDC/PoE power supply. > IP67 protection. 	۴,۱۰۰,۰۰۰
	DH-IPC-HDW1439T1P-A-LED	<p>4 MP Entry Full-color Fixed-focal Eyeball Network Camera</p> <ul style="list-style-type: none"> > 4-MP 1/3" CMOS image sensor, low luminance, and high definition image > H.265 codec, high compression rate, ultra-low bit rate > Outputs max. 4 MP (2560 × 1440)@25/30 fps > Rotation mode, DWDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes > Abnormality detection: Motion detection, video tampering, network disconnection, IP conflict, illegal access > Built-in warm light, and the max. illumination distance is 15 m. > 12V DC/PoE power support > Built-in MIC > IP67 	۴,۲۰۰,۰۰۰
	DH-IPC-HDW2439TP-AS-LED	<p>4MP Lite Full-color Fixed-focal Eyeball Network Camera</p> <ul style="list-style-type: none"> > 4MP, 1/3" CMOS image sensor, low illumination, high image definition > Outputs 4MP (2560 × 1440) @ 25/30 fps, Max. supports 4MP (2688 × 1520) @ 20 fps > H.265 codec, high compression rate, ultra-low bit rate > Built-in warm lights, max. illumination distance: 30 m > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent detection: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, no SD card, SD card full, SD card error, network disconnection, IP conflict, illegal access, voltage detection > Supports max. 256 GB Micro SD card and built-in Mic > 12V DC/PoE power supply > IP67 protection 	۵,۲۵۰,۰۰۰
	DH-IPC-HDW2449TP-S-LED	<p>4MP Full-color Fixed-focal Eyeball Wizsense Network Camera</p> <ul style="list-style-type: none"> > 4-MP 1/2.9" CMOS image sensor, low luminance, and high definition image. > Outputs max. 4 MP (2688 × 1520)@20 fps, and supports (2560×1440)@25/30 fps. > H.265 codec, high compression rate, ultra-low bit rate. > Built-in warm light and the max. illumination distance is 30 m. > ROI, SMART H.264+/H.265+, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent monitoring: Intrusion, tripwire > Abnormality detection: Motion detection, video tampering, audio detection, no SD card, SD card full, SD card error, network disconnection, IP conflict, illegal access, and voltage detection. > Supports max. 256 G Micro SD card; built in Mic. > 12 VDC/PoE power supply. > IP67 protection. > SMD Plus. 	۵,۶۷۰,۰۰۰
	DH-IPC-HDW3549HP-AS-PV	<p>5 MP Smart Dual Light Active Deterrence Fixed-focal Eyeball WizSense Network Camera</p> <ul style="list-style-type: none"> > 5-MP 1/2.7" CMOS image sensor, low luminance, and high definition image. > Outputs max. 5 MP (2960 × 1668) @20 fps and supports 4 MP (2688 × 1520)@25/30 fps. > H.265 codec, high compression rate, ultra-low bit rate. > Built-in warm light and IR LED; IR illumination distance is 30 m and warm light distance is 30 m. > ROI, SMART H.264+/H.265+, AI H.264/H.265, flexible coding > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking > Intelligent monitoring: Intrusion, tripwire > Abnormality detection: Motion detection, privacy masking, scene changing, audio detection, SD card error, network disconnection, IP conflict, illegal access, and voltage detection. > Alarm: 1 in, 1 out; audio: 1 in, 1 out; supports max. 256 G Micro SD card; built-in dual Mic; built-in speaker; 1-ch speaker; support two-way talk. > 12 VDC/PoE power supply.> IP67 protection.> Sound and light alarm (red and blue lights). > SMD 4.0.> One-tap arming/disarming through alarm input. 	۸,۹۳۰,۰۰۰

FULL COLOR NETWORK CAMERA

تصویر

مدل

مشخصات

قیمت



DH-IPC-HDW3849HP-AS-PV











داده های فنی کامل

8 MP Smart Dual Light Active Deterrence Fixed-focal Eyeball WizSense Network Camera
 > 8-MP 1/2.8" CMOS image sensor, low luminance, and high definition image.
 > Outputs max. 840 × 2160@25/30 fps. > ROI, SMART H.264+/H.265+, AI H.264/H.265
 > H.265 codec, high compression rate, ultra-low bit rate.
 > Built-in warmlight and IR LED; the max. IR illumination distance is 30m and warmlight is 30 m.
 > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking
 > Intelligent monitoring: Intrusion, tripwire
 > Abnormality detection: Motion detection, privacy masking, scene changing, audio detection, SD card error, network disconnection, IP conflict, illegal access, and voltage detection.
 > Alarm: 1 in, 1 out; audio: 1 in, 1 out; supports max. 256 G Micro SD card; built-in dual Mic; built-in speaker; 1-ch speaker; support two-way talk
 > 12 VDC/PoE power supply. > IP67 protection. > Sound and light alarm
 > One-tap arming/disarming through alarm input.

۱۴,۰۷۰,۰۰۰

SPEED DOME NETWORK CAMERA

تصویر	مدل	مشخصات	قیمت
	DH-SD29204UE-GN	<p>2MP 4x Starlight IR PTZ Network Camera</p> <ul style="list-style-type: none"> > 1/2.8" STARVIS™ CMOS > Powerful 4x optical zoom > Support Triple-streams encoding > WDR, Day/Night(ICR), Ultra DNR > Max. 25/30fps@1080P > IVS > Support PoE > IR distance up to 30m 	تماس گرفته شود
	DH-SD49425XB-HNR	<p>4MP 25x Starlight IR WizSense Network PTZ Camera</p> <ul style="list-style-type: none"> > 1/2.8" 4Megapixel CMOS > Powerful 25x optical zoom > Starlight technology > Max.25/30fps@4M > Perimeter protection > Support PoE+ > IR distance up to 100m > SMD PLUS > IP66 	۳۱,۵۰۰,۰۰۰
	DH-SD59232XA-HNR	<p>2MP 32x Starlight IR WizSense Network PTZ Camera</p> <ul style="list-style-type: none"> > 1/2.8" STARVIS™ CMOS > Powerful 32x optical zoom > Starlight technology > Max. 50/60fps@1080P > Deep-learning-based auto tracking and perimeter protection > Support PoE+ > IR distance up to 150 m > SMD PLUS > IP66 	۳۷,۶۰۰,۰۰۰
	DH-SD5A232XA-HNR	<p>2MP 32x Starlight IR WizSense Network PTZ Camera</p> <ul style="list-style-type: none"> > 1/2.8" 2Megapixel STARVIS™ CMOS > Powerful 32x optical zoom > Max. 50/60 fps@1080P > IR distance up to 150 m > Deep-learning-based auto tracking and perimeter protection > SMD PLUS > PoE+ > IP67, IK10 > Face Detection 	۳۹,۰۰۰,۰۰۰
	DH-SD5A432XA-HNR	<p>4MP 32x Starlight IR WizSense Network PTZ Camera</p> <ul style="list-style-type: none"> > 1/2.8" 4Megapixel STARVIS™ CMOS > Powerful 32x optical zoom > Max. 25/30fps@4M > IR distance up to 150 m > Deep-learning-based auto tracking and perimeter protection > SMD PLUS > PoE+ > IP67, IK10 > Face Detection 	۴۸,۳۰۰,۰۰۰
	DH-SD5A432XB-HNR	<p>4MP 32x Starlight IR WizSense Network PTZ Camera</p> <ul style="list-style-type: none"> > 1/2.8" 4Megapixel STARVIS™ CMOS > Powerful 32x optical zoom > Max. 25/30 fps@4M > IR distance up to 150 m > Deep-learning-based auto tracking and perimeter protection > SMD PLUS > PoE+ > IP67, IK10 > Face Detection 	۴۸,۳۰۰,۰۰۰
	DH-SD5A432GB-HNR	<p>4MP 32x Starlight IR WizSense Network PTZ Camera</p> <ul style="list-style-type: none"> > 1/2.8" 4Megapixel STARVIS™ CMOS. > Powerful 32x optical zoom. > Max. 25/30 fps@4M. > IR distance up to 150 m. > Auto Tracking 3.0. > Face Detection. > SMD 4.0. > Quick Pick. > PoE+. 	۴۸,۳۰۰,۰۰۰
	DH-SD5A445GB-HNR	<p>4MP 45x Starlight IR Network PTZ Camera</p> <ul style="list-style-type: none"> > 1/2.8" 4Megapixel STARVIS™ CMOS. > 45x optical zoom. > Starlight technology. > Max. 25/30fps@4M. > IR distance up to 150 m. > Auto-tracking 3.0. > Perimeter protection. > Face detection. > SMD 4.0. > Quick Pick. > IP67, IK10. 	۶۴,۲۶۰,۰۰۰

SPEED DOME NETWORK CAMERA

تصویر

مدل

مشخصات

قیمت



DH-SD6AL230F-HNI



2MP 30x Starlight Laser PTZ Network Camera
> 1/1.9" 2Megapixel CMOS
> Powerful 30x optical zoom
> Starlight technology
> Max. 25/30fps@1080P, 25/30/50/60fps@720P> Auto tracking and IVS
> Support Hi-PoE
> IR distance up to 500m
> IP67

قیمت به ازای هر دستگاه

۵۷,۵۴۰,۰۰۰



DH-SD6AL445XA-HNR



4MP 45x Starlight Laser WizMind Network PTZ Camera
> 1/2.8" 4Megapixel CMOS
> Powerful 45x optical zoom
> Starlight technology
> Max. 25/30 fps@4MP
> Deep-learning-based auto tracking and perimeter protection
> Support face detection
> Laser distance up to 550m
> Support Hi-PoE
> SMD PLUS
> IP67



قیمت به ازای هر دستگاه

۹۹,۲۰۰,۰۰۰

NETWORK RECORDER

تصویر	مدل	مشخصات	قیمت
	DHI-NVR4104-4KS2	<ul style="list-style-type: none"> 4 Channel Smart 1U 4K & H.265 Lite Network Video Recorder > 4-channel IP video access > Smart H.265+/Smart H.264+/H.265/H.264; H.265 auto switch > Max 80 Mbps incoming bandwidth > Up to 8MP resolution for preview and playback > 8-channel decoding@1080p (30 fps) > AI by Camera: Perimeter protection; SMD Plus; people counting; heat map 	۴,۷۱۰,۰۰۰
	DHI-NVR4104HS-4KS2	<ul style="list-style-type: none"> 4 Channel Compact 1U 4K&H.265 Lite Network Video Recorder > 4-channel IP video access > Smart H.265+/Smart H.264+/H.265/H.264; H.265 auto switch > Max 80Mbps Incoming Bandwidth > Up to 8MP Resolution for Preview and Playback > 8-channel decoding@1080p (30 fps) > AI by Camera: Perimeter protection; SMD Plus; people counting; heat map 	۴,۸۵۰,۰۰۰
	DHI-NVR4104-P-4KS2	<ul style="list-style-type: none"> 4 Channel Smart 1U 4PoE 4K&H.265 Lite Network Video Recorder > 4-channel IP video access > Smart H.265+/Smart H.264+/H.265/H.264; H.265 auto switch > Max 80 Mbps incoming bandwidth > Up to 8MP Resolution for Preview and Playback > 8-channel decoding@1080p (30 fps) > AI by Camera: Perimeter protection; SMD Plus; people counting; heat map > Support IPC UPnP, 4PoE ports 	۵,۰۰۰,۰۰۰
	DHI-NVR4204-P-4KS2	<ul style="list-style-type: none"> 4 Channel 1U 2HDDs 4PoE 4K & H.265 Lite Network Video Recorder > 4-channel IP video access > Smart H.265+/Smart H.264+/H.265/H.264; H.265 auto switch > Max 200 Mbps incoming bandwidth > Up to 8MP resolution for preview and playback > 8-channel decoding@1080p (30 fps) > AI by Camera: Perimeter protection; SMD Plus; people counting; heat map > Support IPC UPnP, 4 PoE ports 	۴,۱۰۰,۰۰۰
	DHI-NVR2108HS-S3	<ul style="list-style-type: none"> 8 Channel Compact 1U 1HDD Network Video Recorder > Smart H.265+/H.265/Smart H.264+/H.264 decoding format > Max. decoding capability: 6 × 1080p@30 fps. Supports adaptive decoding > AI by camera: perimeter protection, and SMD Plus > Connected to the third-party network cameras > Security baseline 2.1 	۵,۷۸۰,۰۰۰
	DHI-NVR4108-4KS2	<ul style="list-style-type: none"> 8 Channel Smart 1U 4K & H.265 Lite Network Video Recorder > 8-channel IP video access > Smart H.265+/Smart H.264+/H.265/H.264; H.265 auto switch > Max 80 Mbps incoming bandwidth > Up to 8MP resolution for preview and playback > 8-channel decoding@1080p (30 fps) > AI by Camera: Perimeter protection; SMD Plus; people counting; heat map 	۶,۴۰۰,۰۰۰
	DHI-NVR4108HS-4KS2/L	<ul style="list-style-type: none"> 8 Channel Compact 1U 1HDD Network Video Recorder > New 4.0 user interface, Security baseline 2.1 > H.264, H.265, Smart H.264+, and Smart H.265+ · Max. decoding capability: 8 × 1080p@30 fps. Supports adaptive decoding > Supports mainstream cameras of ONVIF and RTSP protocols > P2P remote surveillance, video play on mobile device > VGA/HDMI simultaneous video output, maximum resolution of HDMI is 4K > AI by Camera: Face detection, perimeter protection, IVS, people counting, heat map, and SMD > Supports remote configuration and management of IPC, such as setting parameters, getting information, and upgrading IPC of the same model in batches 	۶,۸۳۰,۰۰۰
	DHI-NVR4108HS-EI	<ul style="list-style-type: none"> 8CH Compact 1U 1HDD WizSense Network Video Recorder > Smart H.265+/H.265/Smart H.264+/H.264/MJPEG decoding format. > Access, storage or forwarding at 80 Mbps. > Max. decoding capability: 16 × 1080p@30 fps. Supports adaptive decoding. > AI by NVR: 1-channel face detection and recognition; 2-channel perimeter protection; up to 10 face databases and 20,000 face images; 4-channel SMD Plus. > AI by Camera: Face detection and recognition, perimeter protection; SMD Plus; people counting; stereo analysis; heat map. > Connected to the third-party network cameras. > Security baseline 2 	۸,۱۹۰,۰۰۰

NETWORK RECORDER

تصویر	مدل	مشخصات	قیمت
	DHI-NVR4108-P-4KS2	<ul style="list-style-type: none"> 8 Channel Smart 1U 4PoE 4K&H.265 Lite Network Video Recorder > 8-channel IP video access > Smart H.265+/Smart H.264+/H.265/H.264; H.265 auto switch > Max 80 Mbps incoming bandwidth > Up to 8MP Resolution for Preview and Playback > 8-channel decoding@1080p (30 fps) > AI by Camera: Perimeter protection; SMD Plus; people counting; heat map > Support IPC UPnP, 4PoE ports 	۷,۸۰۰,۰۰۰
	DHI-NVR4108HS-P-4KS2	<ul style="list-style-type: none"> 4/8 Channel Compact 1U 4PoE 4K&H.265 Lite Network Video Recorder > 8-channel IP video access > Smart H.265+/Smart H.264+/H.265/H.264; H.265 auto switch > Max 200 Mbps incoming bandwidth > Up to 8MP resolution for preview and playback > 8-channel decoding@1080p (30 fps) > AI by Camera: Perimeter protection; SMD Plus; people counting; heat map > Support IPC UPnP, 4 PoE ports 	۷,۸۰۰,۰۰۰
	DHI-NVR4108-8P-4KS2	<ul style="list-style-type: none"> 8 Channel Smart 1U 8PoE 4K&H.265 Lite Network Video Recorder > 8-channel IP video access > Smart H.265+/Smart H.264+/H.265/H.264; H.265 auto switch > Max 80 Mbps incoming bandwidth > Up to 8MP resolution for preview and playback > 8-channel decoding@1080p (30 fps) > AI by Camera: Perimeter protection; SMD Plus; people counting; heat map > Support IPC UPnP, 8 PoE ports 	۸,۳۰۰,۰۰۰
	DHI-NVR4208-4KS2	<ul style="list-style-type: none"> 8 Channel 1U 4K & H.265 Lite Network Video Recorder > 8-channel IP video access > Smart H.265+/Smart H.264+/H.265/H.264; H.265 auto switch > Max 200 Mbps incoming bandwidth > Up to 8MP resolution for preview and playback > 8-channel decoding@1080p (30 fps) > AI by Camera: Perimeter protection; SMD Plus; people counting; heat map 	۷,۸۵۰,۰۰۰
	DHI-NVR4208-8P-4KS2	<ul style="list-style-type: none"> 8 Channel 1U 8PoE 4K & H.265 Lite Network Video Recorder > 8-channel IP video access > Smart H.265+/Smart H.264+/H.265/H.264; H.265 auto switch > Max 200 Mbps incoming bandwidth > Up to 8MP resolution for preview and playback > 8-channel decoding@1080p (30 fps) > AI by Camera: Perimeter protection; SMD Plus; people counting; heat map > Support IPC UPnP, 8 PoE ports 	۸,۷۵۰,۰۰۰
	DHI-NVR4208-8P-4KS2/L	<ul style="list-style-type: none"> 8 Channel 1U 2HDDs 8PoE Network Video Recorder > New 4.0 user interface, Security baseline 2.1 > H.264, H.265, Smart H.264+, and Smart H.265+; H.265 auto switch > Max. decoding capability: 8 × 1080p@30 fps. Supports adaptive decoding > Supports mainstream cameras of ONVIF and RTSP protocols > P2P remote surveillance, video play on mobile device > VGA/HDMI simultaneous video output, maximum resolution of HDMI is 4K > AI by Camera: Face detection, perimeter protection, IVS, people counting, heat map, and SMD > Supports remote configuration and management of IPC, such as setting parameters, getting information, and upgrading IPC of the same model in batches 	۸,۶۰۰,۰۰۰
	DHI-NVR5208-8P-4KS2	<ul style="list-style-type: none"> 8 Channel 1U 2HDDs 8PoE 4K & H.265 Pro Network Video Recorder > 8-channel IP video access > Smart H.265+/Smart H.264+/H.265/H.264/MJPEG; H.265 auto switch > Max 320 Mbps incoming bandwidth > Up to 24MP resolution for live view and playback > 1-channel fisheye dewarping (AI by NVR) > AI by Camera: Perimeter protection; face detection and recognition; SMD Plus; video metadata; ANPR; people counting; stereo analysis; crowd distribution; heat map > Support IPC UPnP, 8 PoE ports 	۱۰,۳۰۰,۰۰۰
	DHI-NVR4116-4KS2	<ul style="list-style-type: none"> 16 Channel Smart 1U 4K & H.265 Lite Network Video Recorder > 16-channel IP video access > Smart H.265+/Smart H.264+/H.265/H.264; H.265 auto switch > Max 80 Mbps incoming bandwidth > Up to 8MP resolution for preview and playback > 8-channel decoding@1080p (30 fps) > AI by Camera: Perimeter protection; SMD Plus; people counting; heat map 	۶,۸۳۰,۰۰۰

NETWORK RECORDER

تصویر	مدل	مشخصات	قیمت
	DHI-NVR4116HS-4KS2/L	<ul style="list-style-type: none"> 16 Channel Compact 1U 1HDD Network Video Recorder > New 4.0 user interface, Security baseline 2.1 > H.264, H.265, Smart H.264+, and Smart H.265+ H.265 auto switch > Max. decoding capability: 8 × 1080p@30 fps. Supports adaptive decoding > Supports mainstream cameras of ONVIF and RTSP protocols > P2P remote surveillance, video play on mobile device > VGA/HDMI simultaneous video output, maximum resolution of HDMI is 4K > AI by Camera: Face detection, perimeter protection, IVS, people counting, heat map, and SMD > Supports remote configuration and management of IPC, such as setting parameters, getting information, and upgrading IPC of the same model in batches 	۸,۸۲۰,۰۰۰
	DHI-NVR4116HS-EI	<ul style="list-style-type: none"> 16CH Compact 1U 1HDD WizSense Network Video Recorder > Smart H.265+/H.265/Smart H.264+/H.264/MJPEG decoding format. > Access, storage or forwarding at 256 Mbps (180 Mbps when AI function enabled). > Max. decoding capability: 16 × 1080p@30 fps. Supports adaptive decoding. > AI by NVR: 1-channel face detection and recognition; 2-channel perimeter protection; up to 10 face databases and 20,000 face images; 4-channel SMD Plus. > AI by Camera: Face detection and recognition, perimeter protection; SMD Plus; people counting; stereo analysis; heat map. > Connected to the third-party network cameras. > Security baseline 2.3. 	۱۰,۵۰۰,۰۰۰
	DHI-NVR4116-8P-4KS2	<ul style="list-style-type: none"> 16 Channel Smart 1U 8PoE 4K&H.265 Lite Network Video Recorder > 16-channel IP video access > Smart H.265+/Smart H.264+/H.265/H.264; H.265 auto switch > Max 80 Mbps incoming bandwidth > Up to 8MP resolution for preview and playback > 8-channel decoding@1080p (30 fps) > AI by Camera: Perimeter protection; SMD Plus; people counting; heat map > Support IPC UPnP, 8 PoE port 	۱۰,۱۵۰,۰۰۰
	DHI-NVR4116HS-8P-4KS2	<ul style="list-style-type: none"> 16 Channel Compact 1U 8PoE 4K & H.265 Lite Network Video Recorder > 16-channel IP video access > Smart H.265+/Smart H.264+/H.265/H.264; H.265 auto switch > Max 80 Mbps incoming bandwidth > Up to 8MP resolution for preview and playback > 8-channel decoding@1080p (30 fps) > AI by Camera: Perimeter protection; SMD Plus; people counting; heat map > Support IPC UPnP, 8PoE ports 	۱۰,۹۵۰,۰۰۰
	DHI-NVR4216-4KS2/L	<ul style="list-style-type: none"> 16 Channel 1U 2HDDs Network Video Recorder > New 4.0 user interface, Security baseline 2.1 > H.264, H.265, Smart H.264+, and Smart H.265+ H.265 auto switch > Max. decoding capability: 8 × 1080p@30 fps. Supports adaptive decoding > Supports mainstream cameras of ONVIF and RTSP protocols > P2P remote surveillance, video play on mobile device > VGA/HDMI simultaneous video output, maximum resolution of HDMI is 4K > AI by Camera: Face detection, perimeter protection, IVS, people counting, heat map, and SMD > Supports remote configuration and management of IPC, such as setting parameters, getting information, and upgrading IPC of the same model in batches 	۱۰,۷۰۰,۰۰۰
	DHI-NVR4216-EI	<ul style="list-style-type: none"> 16CH 1U 2HDDs WizSense Network Video Recorder > Smart H.265+/H.265/Smart H.264+/H.264/MJPEG decoding format. > Access, storage or forwarding at 256 Mbps (180 Mbps when AI function enabled). > Max. decoding capability: 16 × 1080p@30 fps. Supports adaptive decoding. > AI by NVR: 1-channel face detection and recognition; 2-channel perimeter protection; up to 10 face databases and 20,000 face images; 4-channel SMD Plus. > AI by Camera: Face detection and recognition, perimeter protection; SMD Plus; people counting; stereo analysis; heat map. > Connected to the third-party network cameras. > Security baseline 2.3. 	۱۲,۶۰۰,۰۰۰
	DHI-NVR5216-4KS2	<ul style="list-style-type: none"> 16 Channel 1U 2HDDs 4K & H.265 Pro Network Video Recorder > 16-channel IP video access > Smart H.265+/Smart H.264+/H.265/H.264/MJPEG; H.265 auto switch > Max 320 Mbps incoming bandwidth > Up to 24MP resolution for live view and playback > 1-channel fisheye dewarping (AI by NVR) > AI by Camera: Perimeter protection; face detection and recognition; SMD Plus; video metadata; ANPR; people counting; stereo analysis; crowd distribution; heat map 	۱۶,۸۰۰,۰۰۰
	DHI-NVR5216-EI	<ul style="list-style-type: none"> 16 Channels 1U 2HDDs WizSense Network Video Recorder > Smart H.265+/H.265/Smart H.264+/H.264/MJPEG decoding format. > Max. decoding capability: 32 × 1080p@30 fps or 16 × 4MP@30 fps. > Max. 384 Mbps incoming/recording/outgoing bandwidth. > Support AcuPick with Max. 16-Channel. > Support N+M cluster. > AI by recorder: 2-channel face detection and recognition, 4-channel perimeter protection, and 8-channel SMD Plus. > AI by camera: Face detection and recognition, perimeter protection, SMD Plus, metadata, ANPR, stereo analysis, heat map, and people counting. > Security baseline 2.3 	۱۸,۶۹۰,۰۰۰

NETWORK RECORDER

تصویر	مدل	مشخصات	قیمت
	DHI-NVR5216-16P-4KS2E	<ul style="list-style-type: none"> 16 Channel 1U 2HDDs 16PoE 4K & H.265 Pro Network Video Recorder > 16-channel IP video access > Smart H.265+/Smart H.264+/H.265/H.264/MJPEG; H.265 auto switch > Max 320 Mbps incoming bandwidth > Up to 24MP resolution for live view and playback > 1-channel fisheye dewarping (AI by NVR) > AI by Camera: Perimeter protection; face detection and recognition; SMD Plus; video metadata; ANPR; people counting; stereo analysis; crowd distribution; heat map > Support IPC UPnP, 16 PoE ports 	۱۵,۲۵۰,۰۰۰
	DHI-NVR5416-16P-4KS2E	<ul style="list-style-type: none"> 16 Channel 1.5U 4HDDs 16PoE 4K & H.265 Pro Network Video Recorder > 16-channel IP video access > Smart H.265+/Smart H.264+/H.265/H.264/MJPEG; H.265 auto switch > Max 320 Mbps incoming bandwidth > Up to 24MP resolution for live view and playback > 1-channel fisheye dewarping (AI by NVR) > AI by Camera: Perimeter protection; face detection and recognition; SMD Plus; video metadata; ANPR; people counting; stereo analysis; crowd distribution; heat map > Support IPC UPnP, 16 PoE ports 	۱۸,۰۰۰,۰۰۰
	DHI-NVR4232-4KS2/L	<ul style="list-style-type: none"> 32 Channel 1U 2HDDs Network Video Recorder > New 4.0 user interface, Security baseline 2.1 > H.264, H.265, Smart H.264+, and Smart H.265+; H.265 auto switch > Max. decoding capability: 8 × 1080p@30 fps. Supports adaptive decoding > Supports mainstream cameras of ONVIF and RTSP protocols > P2P remote surveillance, video play on mobile device > VGA/HDMI simultaneous video output, maximum resolution of HDMI is 4K > AI by Camera: Face detection, perimeter protection, IVS, people counting, heat map, and SMD > Supports remote configuration and management of IPC, such as setting parameters, getting information, and upgrading IPC of the same model in batches 	۱۲,۸۰۰,۰۰۰
	DHI-NVR4232-EI	<ul style="list-style-type: none"> 32CH 1U 2HDDs WizSense Network Video Recorder > Smart H.265+/H.265/Smart H.264+/H.264/MJPEG decoding format. > Access, storage or forwarding at 256 Mbps (180 Mbps when AI function enabled). > Max. decoding capability: 16 × 1080p@30 fps. Supports adaptive decoding. > AI by NVR: 1-channel face detection and recognition; 2-channel perimeter protection; up to 10 face databases and 20,000 face images; 4-channel SMD Plus. > AI by Camera: Face detection and recognition, perimeter protection; SMD Plus; people counting; stereo analysis; heat map. > Connected to the third-party network cameras. > Security baseline 2.3. 	۱۵,۷۵۰,۰۰۰
	DHI-NVR5232-4KS2	<ul style="list-style-type: none"> 32 Channel 1U 2HDDs 4K & H.265 Pro Network Video Recorder > 32-channel IP video access > Smart H.265+/Smart H.264+/H.265/H.264/MJPEG; H.265 auto switch > Max 320 Mbps incoming bandwidth > Up to 24MP resolution for live view and playback > 1-channel fisheye dewarping (AI by NVR) > AI by Camera: Perimeter protection; face detection and recognition; SMD Plus; video metadata; ANPR; people counting; stereo analysis; crowd distribution; heat map 	۲۲,۱۶۰,۰۰۰
	DHI-NVR5232-EI	<ul style="list-style-type: none"> 32 Channels 1U 2HDDs WizSense Network Video Recorder > Smart H.265+/H.265/Smart H.264+/H.264/MJPEG decoding format. > Max. decoding capability: 32 × 1080p@30 fps or 32 × 2MP@30 fps. > Max. 384 Mbps incoming/recording/outgoing bandwidth. > Support AcuPick with Max. 16-Channel. > Support N+M cluster. > AI by recorder: 2-channel face detection and recognition, 4-channel perimeter protection, and 8-channel SMD Plus. > AI by camera: Face detection and recognition, perimeter protection, SMD Plus, metadata, ANPR, stereo analysis, heat map, and people counting. > Security baseline 2.3. 	۲۵,۷۳۰,۰۰۰
	DHI-NVR4232-16P	<ul style="list-style-type: none"> 32 Channel 16PoE 1U Lite Network Video Recorder > 32 channel IP video access > H.264+/H.264 codec decoding > Max 200Mbps Incoming Bandwidth > Up to 5MP Resolution for Preview and Playback > HDMI/VGA simultaneous video output > Support IPC UPnP, 16PoE ports > Support ANR technology to enhance the storage reliability when the network break down 	۲,۱۰۰,۰۰۰
	DHI-NVR4232-16P-4KS2	<ul style="list-style-type: none"> 32 Channel 1U 16PoE 4K & H.265 Lite Network Video Recorder > 32-channel IP video access > Smart H.265+/Smart H.264+/H.265/H.264; H.265 auto switch > Max 200 Mbps incoming bandwidth > Up to 8MP resolution for preview and playback > 8-channel decoding@1080p (30 fps) > AI by Camera: Perimeter protection; SMD Plus; people counting; heat map > Support IPC UPnP, 16 PoE ports 	۱۸,۸۰۰,۰۰۰









NETWORK RECORDER

تصویر	مدل	مشخصات	قیمت
	DHI-NVR4432	<p>32CH 1.5U Network Video Recorder</p> <ul style="list-style-type: none"> > 32 channel IP camera input > H.264/MJPEG dual codec decoding > Max 200Mbps incoming bandwidth > Up to 5Mp resolution preview&playback > HDMI/VGA/TV simultaneous video output > 8/16 channel synchronous realtime playback, GRID interface > ONVIF Version 2.4 conformance > 3D intelligent positioning with Dahua PTZ camera > Support 4 SATA HDDs up to 16TB, 1 eSATA port, 2 USB(1 USB3.0) > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS 	۴,۲۰۰,۰۰۰
	DHI-NVR4432-4KS2	<p>32 Channel 1.5U 4K&H.265 Lite Network Video Recorder</p> <ul style="list-style-type: none"> > 32-channel IP video access > Smart H.265+/H.265/Smart H.264+/H.264 > Max 200Mbps Incoming Bandwidth > Up to 8MP Resolution for Preview and Playback > 8-channel decoding@1080p (30 fps) > AI by Camera: Perimeter protection; SMD Plus; people counting; heat map 	۲۵,۲۰۰,۰۰۰
	DHI-NVR4432-4KS2/I	<p>32 Channel 1.5U 4HDDs WizSense Network Video Recorder</p> <ul style="list-style-type: none"> > Smart H.265+/H.265/Smart H.264+/H.264/MJPEG decoding format > Access, storage or forwarding at 256 Mbps (160 Mbps when AI function enabled) > Max. decoding capability: 10 × 1080p@30 fps. Supports adaptive decoding > AI by NVR: 1-channel face detection and recognition; 2-channel perimeter protection; up to 10 face databases and 20,000 face images; 4-channel SMD Plus > AI by Camera: Face detection and recognition, perimeter protection; SMD Plus; ANPR; people counting; stereo analysis; heat map > Security baseline 2.1 	۲۴,۴۷۰,۰۰۰
	DHI-NVR5432-4KS2	<p>32 Channel 1.5U 4HDDs 4K & H.265 Pro Network Video Recorder</p> <ul style="list-style-type: none"> > 32-channel IP video access > Smart H.265+/Smart H.264+/H.265/H.264/MJPEG; H.265 auto switch > Max 320 Mbps incoming bandwidth > Up to 24MP resolution for live view and playback > 1-channel fisheye dewarping (AI by NVR) > AI by Camera: Perimeter protection; face detection and recognition; SMD Plus; video metadata; ANPR; people counting; stereo analysis; crowd distribution; heat map 	۲۸,۰۴۰,۰۰۰
	DHI-NVR5432-EI	<p>32 Channels 1.5U 4HDDs WizSense Network Video Recorder</p> <ul style="list-style-type: none"> > Smart H.265+/H.265/Smart H.264+/H.264/MJPEG decoding format. > Max. decoding capability: 32 × 1080p@30 fps or 32 × 2MP@30 fps. > Max. 384 Mbps incoming/recording/outgoing bandwidth. > Support AcuPick with Max. 16-Channel. > Support N+M cluster. > AI by recorder: 2-channel face detection and recognition, 4-channel perimeter protection, and 8-channel SMD Plus. > AI by camera: Face detection and recognition, perimeter protection, SMD Plus, metadata, ANPR, stereo analysis, heat map, and people counting. > Security baseline 2.3. 	۳۵,۱۰۰,۰۰۰
	DHI-NVR4832-4KS2	<p>32 Channel 2U 4K&H.265 Lite Network Video Recorder</p> <ul style="list-style-type: none"> > 16/32-channel IP video access > Smart H.265+/Smart H.264+/H.265/H.264; H.265 auto switch > Max 200 Mbps incoming bandwidth > Up to 8MP resolution for preview and playback > 8-channel decoding@1080p (30 fps) > AI by Camera: Perimeter protection; SMD Plus; people counting; heat map 	۲۸,۰۳۰,۰۰۰
	DHI-NVR5832-4KS2	<p>32 Channel 2U 8HDDs 4K & H.265 Pro Network Video Recorder</p> <ul style="list-style-type: none"> > 32-channel IP video access > Smart H.265+/Smart H.264+/H.265/H.264/MJPEG; H.265 auto switch > Max 320 Mbps incoming bandwidth > Up to 24MP resolution for live view and playback > 1-channel fisheye dewarping (AI by NVR) > AI by Camera: Perimeter protection; face detection and recognition; SMD Plus; video metadata; ANPR; people counting; stereo analysis; crowd distribution; heat map 	۳۹,۶۰۰,۰۰۰
	DHI-NVR5832-EI	<p>32 Channels 2U 8HDD WizSense Network Video Recorder</p> <ul style="list-style-type: none"> > Smart H.265+/H.265/Smart H.264+/H.264/MJPEG decoding format. > Max. decoding capability: 32 × 1080p@30 fps or 32 × 2MP@30 fps. > Max. 384 Mbps incoming/recording/outgoing bandwidth. > Support AcuPick with Max. 16-Channel. > Support N+M cluster. > Support Raid0/1/5/6/10. > AI by recorder: 2-channel face detection and recognition, 4-channel perimeter protection, and 8-channel SMD Plus. > AI by camera: Face detection and recognition, perimeter protection, SMD Plus, metadata, ANPR, stereo analysis, heat map, and people counting. > Security baseline 2.3. 	۴۷,۰۰۰,۰۰۰

NETWORK RECORDER

تصویر	مدل	مشخصات	قیمت
	DHI-NVR5464-4KS2	<ul style="list-style-type: none"> 64 Channel 1.5U 4HDDs 4K & H.265 Pro Network Video Recorder > 64-channel IP video access > Smart H.265+/Smart H.264+/H.265/H.264/MJPEG; H.265 auto switch > Max 320 Mbps incoming bandwidth > Up to 24MP resolution for live view and playback > 1-channel fisheye dewarping (AI by NVR) > AI by Camera: Perimeter protection; face detection and recognition; SMD Plus; video metadata; ANPR; people counting; stereo analysis; crowd distribution; heat map 	۳۶,۲۳۰,۰۰۰
	DHI-NVR5464-EI	<ul style="list-style-type: none"> 64 Channels 1.5U 4HDDs WizSense Network Video Recorder > Smart H.265+/H.265/Smart H.264+/H.264/MJPEG decoding format. > Max. decoding capability: 32 × 1080p@30 fps or 32 × 2MP@30 fps. > Max. 384 Mbps incoming/recording/outgoing bandwidth. > Support AcuPick with Max. 16-Channel. > Support N+M cluster. > AI by recorder: 2-channel face detection and recognition, 4-channel perimeter protection, and 8-channel SMD Plus. > AI by camera: Face detection and recognition, perimeter protection, SMD Plus, metadata, ANPR, stereo analysis, heat map, and people counting. > Security baseline 2.3. 	۴۳,۲۶۰,۰۰۰
	DHI-NVR5864-4KS2	<ul style="list-style-type: none"> 64 Channel 2U 8HDDs 4K & H.265 Pro Network Video Recorder > 64-channel IP video access > Smart H.265+/Smart H.264+/H.265/H.264/MJPEG; H.265 auto switch > Max 320 Mbps incoming bandwidth > Up to 24MP resolution for live view and playback > 1-channel fisheye dewarping (AI by NVR) > AI by Camera: Perimeter protection; face detection and recognition; SMD Plus; video metadata; ANPR; people counting; stereo analysis; crowd distribution; heat map 	۵۳,۶۶۰,۰۰۰
	DHI-NVR5864-EI	<ul style="list-style-type: none"> 64 Channels 2U 8HDDs WizSense Network Video Recorder > Smart H.265+/H.265/Smart H.264+/H.264/MJPEG decoding format. > Max. decoding capability: 32 × 1080p@30 fps or 32 × 2MP@30 fps. > Support AcuPick with Max. 16-Channel. > Support N+M cluster. > Support Raid0/1/5/6/10. > Max. 384 Mbps incoming/recording/outgoing bandwidth. > AI by recorder: 2-channel face detection and recognition, 4-channel perimeter protection, and 8-channel SMD Plus. > AI by camera: Face detection and recognition, perimeter protection, SMD Plus, metadata, ANPR, stereo analysis, heat map, and people counting. > Security baseline 2.3. 	۵۶,۱۰۰,۰۰۰
	DHI-NVR608-32-4KS2	<ul style="list-style-type: none"> 32 Channel 2U 8HDDs Ultra series Network Video Recorder > New 4.0 user interface > 16-channel decoding@1080p (30 fps); self-adaptive decoding capability > Access, storage or forwarding at 384 Mbps > Simultaneous video output forVGAand HDMI1;4Kheterogeneous output for the2 HDMI ports > Multiple data mode such as Raid0, Raid1, Raid5, Raid6, and Raid10 > Remote configuration and management of IPCs, such as setting parameters, acquiring information and upgrading IPCs of the same model in batches > AI-by-camera functions such as perimeter protection, face detection and recognition, SMD Plus, video metadata, ANPR and 3D behavior analysis > N+M cluster. When the host fails, the standbydevice will continue to record; once the host recovers,video recorded on the standby device will be transmitted back 	۵۰,۲۰۰,۰۰۰
	DHI-NVR608H-32-XI	<ul style="list-style-type: none"> 32 Channels 2U 8HDDs WizMind Network Video Recorder > 32-channel 1080p self-adaptive decoding capability. > Max. 1024/1024/800Mbps incoming/recording/outgoing bandwidth. > Supports N+M cluster. > Support Raid0/1/5/6/10. > Drawer-like chassis design allows for HDD hot swapping. > AI by recorder: 4-channel face detection and recognition; 8-channel metadata; 24-channel perimeter protection; 32-channel SMD Plus. > AI by camera: Face detection and recognition, perimeter protection, SMD Plus, metadata, ANPR, and people counting. 	۸۱,۷۰۰,۰۰۰
	DHI-NVR608-64-4KS2	<ul style="list-style-type: none"> 64 Channel 2U 8HDDs Ultra series Network Video Recorder > New 4.0 user interface > 16-channel decoding@1080p (30 fps); self-adaptive decoding capability > Access, storage or forwarding at 384 Mbps > Simultaneous video output for VGA and HDMI1; 4K heterogeneous output for the 2 HDMI ports > Supports RAID 0/1/5/10Multiple data mode such as Raid0, Raid1, Raid5, Raid6, and Raid10 > Remote configuration and management of IPCs, such as setting parameters, acquiring information and upgrading IPCs of the same model in batches > AI-by-camera functions such as perimeter protection, face detection and recognition, SMD Plus, video metadata, ANPR and 3D behavior analysis > N+M cluster. When the host fails, the standbydevice will continue to record; once the host recovers,video recorded on the standby device will be transmitted back 	۹۳,۵۰۰,۰۰۰
	DHI-NVR608R-64-4KS2	<ul style="list-style-type: none"> 64 Channel 2U 8HDDs Ultra series Network Video Recorder > New 4.0 user interface > 16-channel decoding@1080p (30 fps); self-adaptive decoding capability > Access, storage or forwarding at 384 Mbps > Simultaneous video output for VGA and HDMI1; 4K heterogeneous output for the 2 HDMI ports > Multiple data mode such as Raid0, Raid1, Raid5, Raid6, and Raid10 > Remote configuration and management of IPCs, such as setting parameters, acquiring information and upgrading IPCs of the same model in batches > AI-by-camera functions such as perimeter protection, face detection and recognition, SMD Plus, video metadata, ANPR and 3D behavior analysis > N+M cluster. When the host fails, the standbydevice will continue to record; once the host recovers,video recorded on the standby device will be transmitted back 	۹۴,۳۰۰,۰۰۰


NETWORK RECORDER

تصویر	مدل	مشخصات	قیمت
 <p>Wiz Mind</p>	<p>DHI-NVR608H-64-XI</p> 	<p>64 Channels 2U 8HDDs WizMind Network Video Recorder</p> <ul style="list-style-type: none"> > 32-channel 1080p self-adaptive decoding capability. > Max. 1024/1024/800Mbps incoming/recording/outgoing bandwidth. > Supports N+M cluster. > Support Raid0/1/5/6/10. > Drawer-like chassis design allows for HDD hot swapping. > AI by recorder: 4-channel face detection and recognition; 8-channel metadata; 24-channel perimeter protection; 32-channel SMD Plus. > AI by camera: Face detection and recognition, perimeter protection, SMD Plus, metadata, ANPR, and people counting. 	۱۰۰,۰۰۰,۰۰۰
	<p>DHI-NVR608-128-4KS2</p> 	<p>128 Channel 2U 8HDDs Ultra series Network Video Recorder</p> <ul style="list-style-type: none"> > New 4.0 user interface > 16-channel decoding@1080p (30 fps); self-adaptive decoding capability > Access, storage or forwarding at 384 Mbps > Simultaneous video output for VGA and HDMI1;4heterogeneous output for the2HDMI ports > Supports RAID 0/1/5/10Multiple data mode such as Raid0,Raid1,Raid5,Raid6,and Raid10 > Remote configuration and management of IPCs, such as setting pa rameters, acquiring information and upgrading IPCs of the same model in batches > AI-by-camera functions such as perimeter protection, face detection and recognition, SMD Plus, video metadata, ANPR and 3D behavior analysis > N+M cluster. When the host fails, the standbydevice will continue to record; once the host recovers,video recorded on the standby device will be transmitted back 	۱۰۰,۴۰۰,۰۰۰
 <p>Wiz Mind</p>	<p>DHI-NVR608H-128-XI</p> 	<p>128 Channels 2U 8HDDs WizMind Network Video Recorder</p> <ul style="list-style-type: none"> > 32-channel 1080p self-adaptive decoding capability. > Max. 1024/1024/800Mbps incoming/recording/outgoing bandwidth. > Supports N+M cluster. > Support Raid0/1/5/6/10. > Drawer-like chassis design allows for HDD hot swapping. > AI by recorder: 4-channel face detection and recognition; 8-channel metadata; 24-channel perimeter protection; 32-channel SMD Plus. > AI by camera: Face detection and recognition, perimeter protection, SMD Plus, metadata, ANPR, and people counting. 	۱۵۵,۰۰۰,۰۰۰
	<p>DHI-NVR616-64-4KS2</p> 	<p>64 Channel 3U 16HDDs Ultra series Network Video Recorder</p> <ul style="list-style-type: none"> > New 4.0 user interface > 16-channel decoding @1080p (30 fps); self-adaptive decoding capability > Access, storage or forwarding at 384 Mbps > Simultaneous video output for VGA and HDMI1; 4K heterogeneous output for the 2 HDMI ports > Multiple data mode such as Raid0, Raid1, Raid5, Raid6, and Raid10 > Remote configuration and management of IPCs, such as setting pa rameters, acquiring information and upgrading IPCs of the same model in batches > AI-by-camera functions such as perimeter protection, face detection and recognition, SMD Plus, video metadata, ANPR and 3D behavior analysis > N+M cluster. When the host fails, the standbydevice will continue to record; once the host recovers,video recorded on the standby device will be transmitted back 	۱۲۵,۰۰۰,۰۰۰

WWW.SANAT-AMN.COM

الکترونیکی سنتامن

SANAT AMN ELECTRONIC

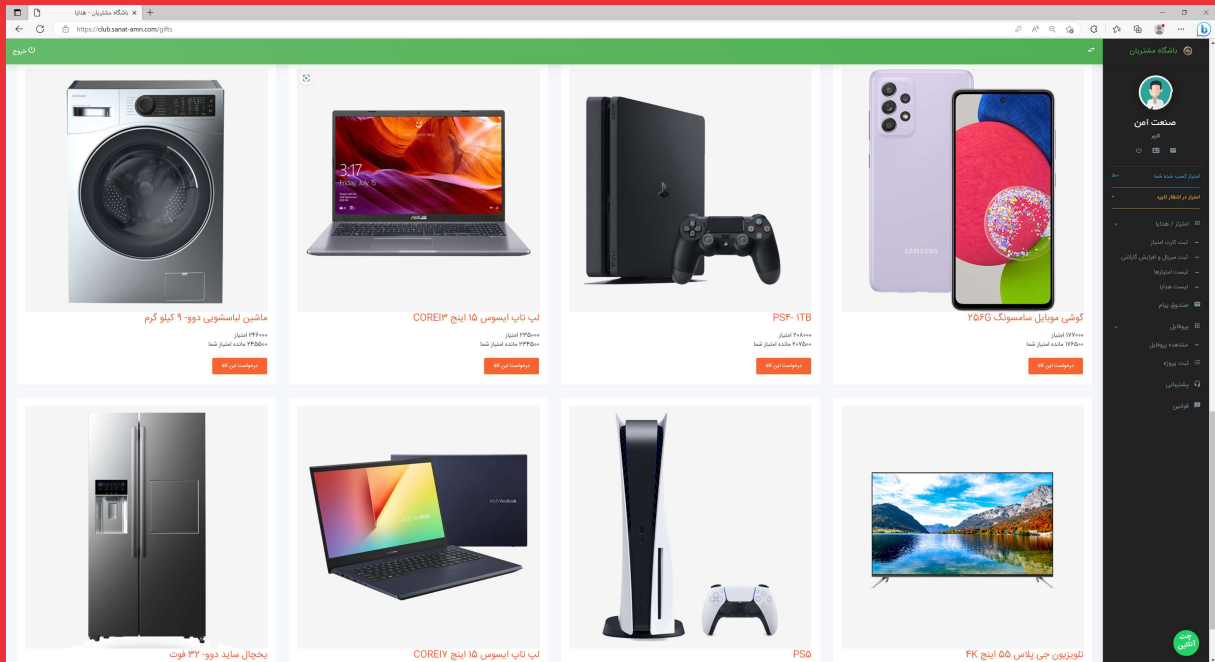

با خرید و ثبت کد با تگ ماه متترین
صنعت امن از هدایای ویژه بهره مند شوید

